

### LED Lighting



Compact profile design, plug and play.  
Easy to install.

- X-STICK-500-CW** 24 Cool white(6000K) SMD LEDs, length 500mm in extrusion aluminum
- X-STICK-1000-CW** 48 Cool white(6000K) SMD LEDs, length 1000mm in extrusion aluminum

#### ► DESCRIPTION

X-Stick-500/1000-CW is a simple 24/48 cool white LEDs strip lighting fixture and Controlled by X-DRIVER 4 dimmable or 24VDC power. With its Extrusion aluminum case and clear transparent cover, compact profile and slim design, X- Stick is available in mounting on fix stand and wall mounting.


#### ► SPECIFICATION

<b>LIGHT SOURCE</b>	24/48 cool white(6000K) SMD LEDs
<b>SOURCE LIFE</b>	50,000 hours under normal operating conditions
<b>POWER REQUIREMENT</b>	24VDC
<b>POWER CONSUMPTION</b>	5W /10W max.
<b>CURRENT CONSUMPTION</b>	200mA / 400mA max.
<b>BEAM ANGLE</b>	120 degree
<b>HOUSING</b>	Extrusion aluminum and Polycarbonate with UV stablizer
<b>FIRE PROTECTION RATING</b>	UL 94 V-2
<b>INGRESS PROTECTION RATING</b>	IP20
<b>CONTROL</b>	Controlled by X-DRIVER 4 dimmable or 24VDC power
<b>POWER SUPPLY</b>	100-240VAC I/P, 24VDC O/P, 150W; one power supply connect to max 30 units.
<b>CONNECTION</b>	2-pin terminal
<b>LISTING</b>	CE certified
<b>OPERATION TEMPERATURE</b>	-10 degC to +50 degC
<b>STORAGE TEMPERATURE</b>	-20 degC to +70 degC
<b>DIMENSION</b>	500/1000(L) x 28(W)x30(H)mm
<b>WEIGHT</b>	300g

#### ► POWER / DATA EXTENSION CABLE

Power/Data Connection Cable of X-STICK 500, L=380mm, 24VDC, **6A** max.

Link up length **30pcs** X-STICK 500 Max.

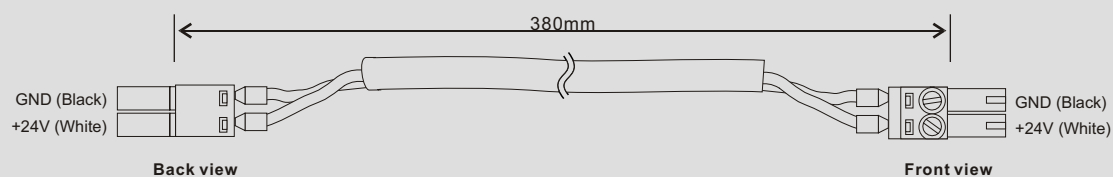

\*\* All rights reserved. Improvement and changes to specifications, design and all contents in this catalog, may be made at any time without prior notice.