


AL DRIVER 400™

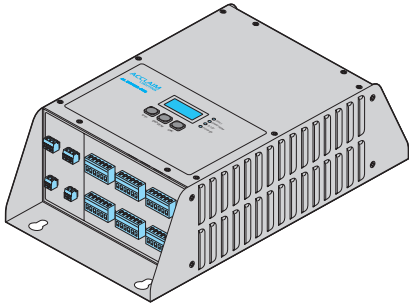

Client:

Project:

Type:

Order Code:

Quantity:

The **AL Driver 400** is a multi-protocol, 400W driver for low voltage LED products. The input control protocols include DMX, RDM, 0-10V and DALI; and it features either a 12V or 24V DC output. It offers maximum flexibility with your front end control preferences.

SPECIFICATIONS

| | |
|-------------------------------|--|
| Input Voltage | 100-277VAC, 50/60Hz |
| Output Voltage | 12VDC or 24VDC |
| DC Output Wattage | 400W |
| DC Output Current | 6.6A Max per channel |
| Control Input Protocols | DMX, RDM, 0-10V (Source Only), DALI |
| Control Output Protocols | PWM |
| Max Power Consumption | 4.167A, 500W @ 120VAC |
| Optional Operating Modes | Static color selection, Internal preset program |
| Internal Sensors | Temperature & usage, data accessible via on-board display |
| Finish | Black |
| Housing Material | Aluminum |
| IP Rating | IP22, Dry Location |
| Ambient Operating Temperature | 14° F to 113° F (-10° C to 45° C) |
| Connectors | 6 pin terminals for PWM outputs, 3 pin terminals for DMX, 2 pin terminals for 0-10V & DALI |
| Warranty | 5 Years, Limited |
| Weight | 8.4 lbs (3.8 kg) |
| Dimensions | L 13.38" x W 9" x H 3.14" (L 340 x W 230 x H 80mm) |

Certifications



Specifications subject to change

AL DRIVER 400™

ORDER CODE

Model
Wattage
DC Output Voltage

ALD - 400 - ##

Voltage:
12 = 12VDC
24 = 24VDC

12V compatible with:
Flex II

24V compatible with:
Flex III
Flex Pro
Flex Eco
Flex Spectrum
Flex Tube
Flex Tube SE
AL Graze DC CV
Rebel Drum Series CV

DIMENSIONS

