

PROJECT

FIRM

ORDER #

TYPE

QTY


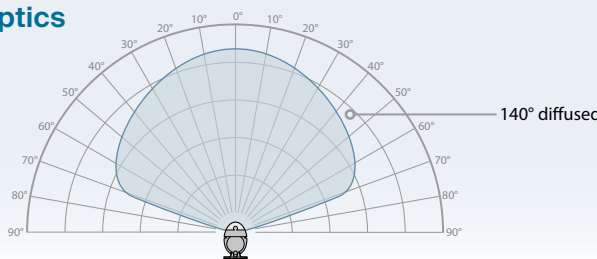



Linear XTR Direct View™ fixtures are designed to be visible and precision engineered to deliver very long all-weather runs. When powered by standard mains (100 to 277VAC) they can achieve daisy-chained runs of up to 400 feet (121m). However, when supplied by an optional XTR Driver, the maximum length of a single daisy-chained run can be raised to an impressive 700 feet (213m).


Available in both 1' and 4' lengths, there are also numerous emitter color and power options. The custom diffused lens homogenizes the emitter output beautifully without adversely affecting brightness.


Control is achieved using the industry standard DMX-512A format, with RDM for configuration. DALI and 0-10V control inputs can also be used when optional XTR Drivers are used.


At a glance



Optics




Emitters


Fixed White
(2700K, 3000K, 3500K or 4000K)


Dynamic White (DW)
(2400K to 5500K)



RGBW
(W=3000K, 4000K or 6000K)


RGBA



Power

100 to 277VAC
50/60Hz


380VDC
via XTR Driver


Temperature


-40° F to 131° F
-40° C to 55° C



Protection

Ingress: IP66
Impact: IK10
Vibration: 3G


Output

Up to 752 lumens
per linear foot


Core technology



Configure your product

XD -2 2- N N

Example final code: **XDS-242-DNEN**

Power (/ ft):
S = SO 12W
E = EO 5W
L = LO 2.5W

Finish:
1 = Black* (RAL 9005)
2 = White* (RAL 9003)
4 = Aluminum
7 = Custom* (RAL #)

Length:
A = 1' (305mm)
D = 4' (1220mm)

Emitters:
D = 2700K*
E = 3000K
F = 3500K*
G = 4000K
X = DW (2400K - 5500K)*
U = RGBW, W=3000K
V = RGBW, W=4000K
W = RGBW, W=6000K*
T = RGBA*

* indicates special order items, which may require longer lead times



PROJECT






FIRM

ORDER #

TYPE

QTY

Specifications

Emitters	2700K, 3000K, 3500K, 4000K, DW (2400K-5500K), RGBW (W=3000K, 4000K or 6000K) or RGBA
Optics	140°
Output	SO: up to 752 l/ft (white), EO: up to 375 l/ft (white), LO: up to 187 l/ft (white)
Lumen maintenance	L ₇₀ 150,000 hours (@ 25° C)
Control	0-100% dimming via wired DMX (with RDM configuration). 0-10V and DALI via XTR Driver <i>Single color models will default to 100% (on/off) output if the control input is absent (see page 10).</i>
Maximum fixtures in series	Up to 700' (213m) via XTR Driver 4000 /8000 (See page 10)
Housing lengths	1' (305mm) or 4' (1220mm)
Operating voltage	100-277VAC, 50/60Hz direct or 380VDC via XTR Driver 4000/8000 (200-300VAC input to XTR Driver)
Power consumption	SO: 1': 12W 4': 48W, EO: 1': 5W 4': 20W, LO: 1': 2.5W 4': 10W
Connection	Composite IP68-rated input and output connectors. All cables are NEC compliant
Mounting	Two built-in ratcheted (tool-free) swivel mount brackets
Material	Aluminum body with frosted PMMA top lens
Finish	Finished aluminum, black (RAL 9005), white (RAL 9003) or custom colors (provide RAL #) Optional marine coating available
Ambient temperature range	-40° F to 131° F (-40° C to 55° C)
Ingress protection	IP66, wet location
Impact protection	IK10, protection against 20 joule impact (40cm distance)
Vibration protection	ANSI C136.31, 3G-rated for high vibration and bridge applications
Warranty	5 years, limited
Weight	1': 1.8 lbs (0.81kg) 4': 7.2 lbs (3.26kg)
Dimensions	LxWxH: 12 or 48" x 1.77" x 2.78" (305 or 1220 x 45 x 70.7mm) - see page 5
Certifications	    

Photometrics

For all available IES files, please visit <https://acclaimlighting.com/linear-xtr-direct-view>

Color or color temperature	Lumens (/ ft)	Max Candela	Efficacy (lm/W)	CRI (Ra)	TM30
3000K (SO, 1ft)	752	171	75	82.5	85.6
4000K (SO, 1ft)	752	170	75	80.9	84.3
RGBW (SO, 1ft)	368	84.3	31	61.2	71.5
3000K (EO, 1ft)	375	90	75	82.6	85.0
4000K (EO, 1ft)	380	88	76	81.8	84.3
RGBW (EO, 1ft)	161	65	32	70.1	72.4

PROJECT

FIRM

ORDER #


TYPE

QTY

Related components

Optional mounting accessories

Extender bars

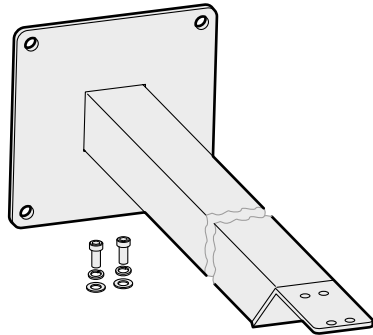

6"
1'
2'
3'


XTREB05
XTREB1
XTREB2
XTREB3

XTR Drivers (optional for extended run lengths)

- Power input: 200 to 300VAC
- Control input: DMX/RDM, 0-10V sink or DALI

XTR Driver 4000


- Up to 4000W power consumption
- Maximum of 1x 700' Linear XTR run*

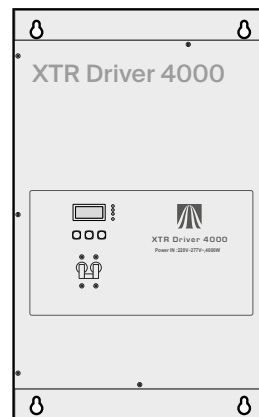

Part # **XTR Driver 4000**

XTR Driver 8000

- Up to 8000W power consumption
- Maximum of 2x 700' Linear XTR runs*

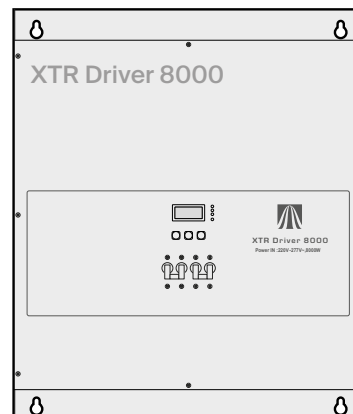

Part # **XTR Driver 8000**

** All fixtures controlled within a single DMX universe*



PROJECT

FIRM


ORDER #

TYPE

QTY


Related components

Feed cables (inc terminator)

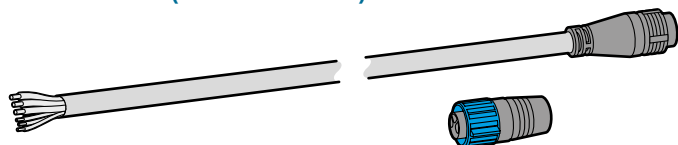


10' (3m) XTRFC10
50' (15m) XTRFC50
100' (30m) XTRFC100

Link cables

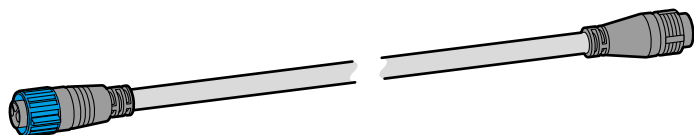


6" (15cm) XTRLC0.5
1' (30cm) XTRLC1
5' (1.5m) XTRLC5
10' (3m) XTRLC10
50' (15m) XTRLC50
100' (30m) XTRLC100

Terminator (end cap)




Terminator XTRECT

IP66 junction box (plus outlet cable gland)

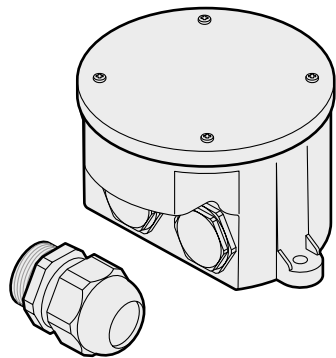


Part # **AJBOX1**
IP66 NEC compliant high+low voltage junction box
1/2" conduit inputs for AC + DMX, 3/4" conduit for XTRFC#
Built-in AC surge protection up to 10kV & 10kA
Suitable for 120-277VAC runs. Not certified for use with XTR Drivers

Signal protocol converters (see page 8)




0-10V single channel converter

UDM



0-10V multiple channel converter


ZDM 6

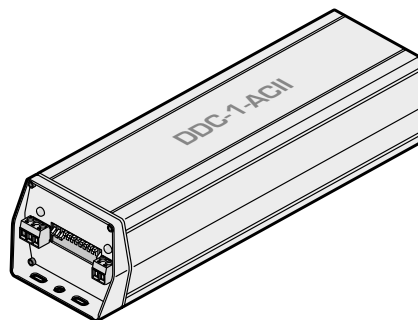

DALI multiple channel converter

DDC 1 AC

Test and configuration tool kit

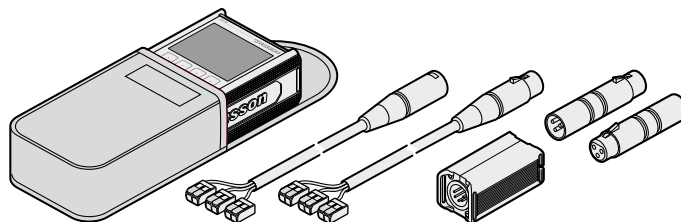

XMT-500

DMX/RDM, ArtNet and sACN test/configuration tool with cable dongle, 3/5-pin converters, bare cable connectors and pouch

PROJECT


FIRM

ORDER #

TYPE

QTY


Dimensions

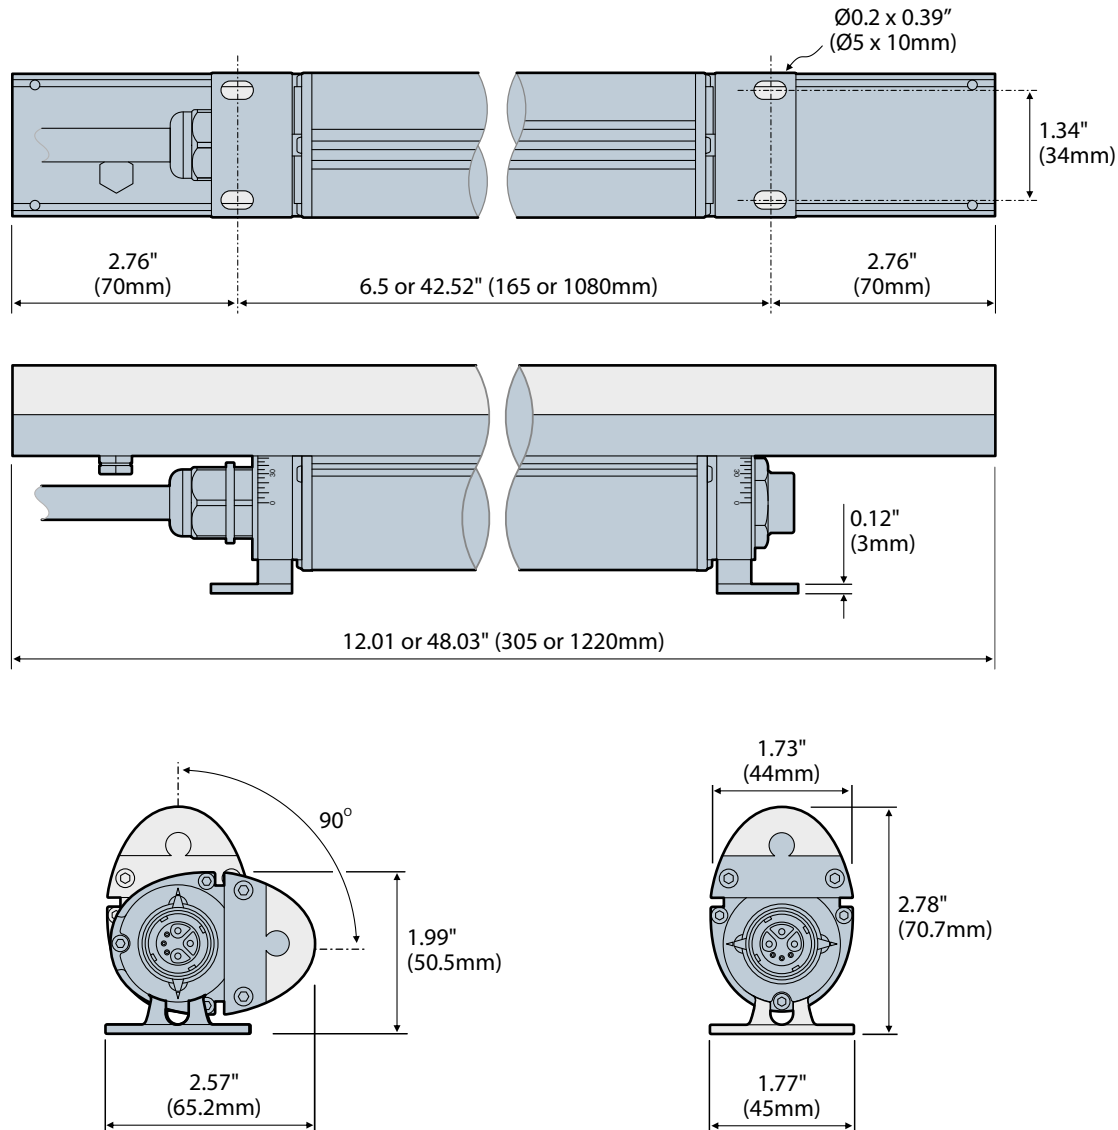

PROJECT	FIRM	ORDER #	TYPE	QTY
---------	------	---------	------	-----


Dimensions

Optional extender bars

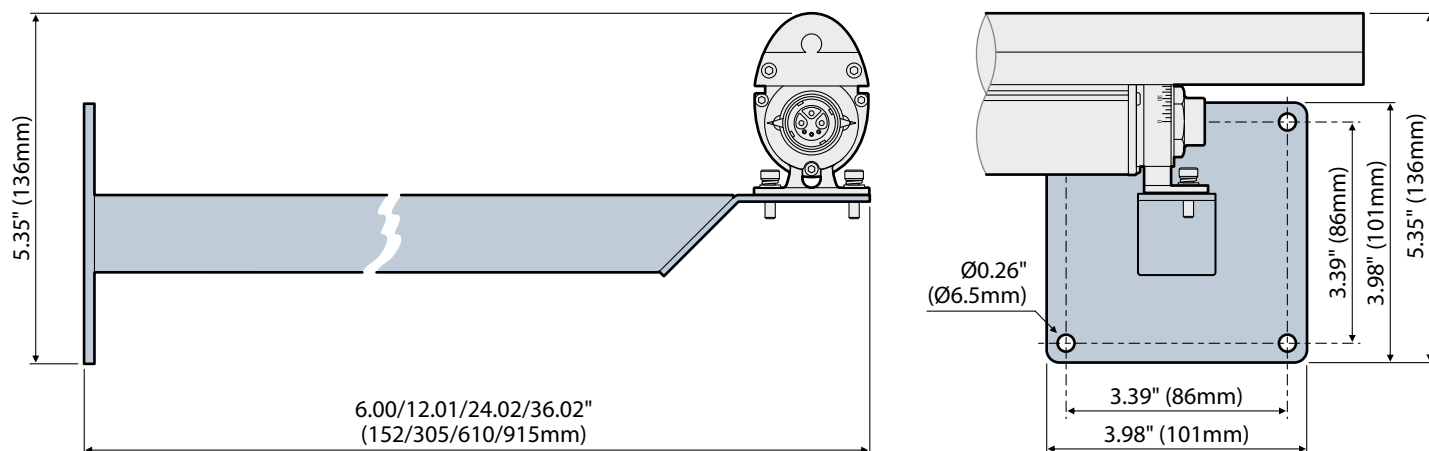


Cables


Feed cable

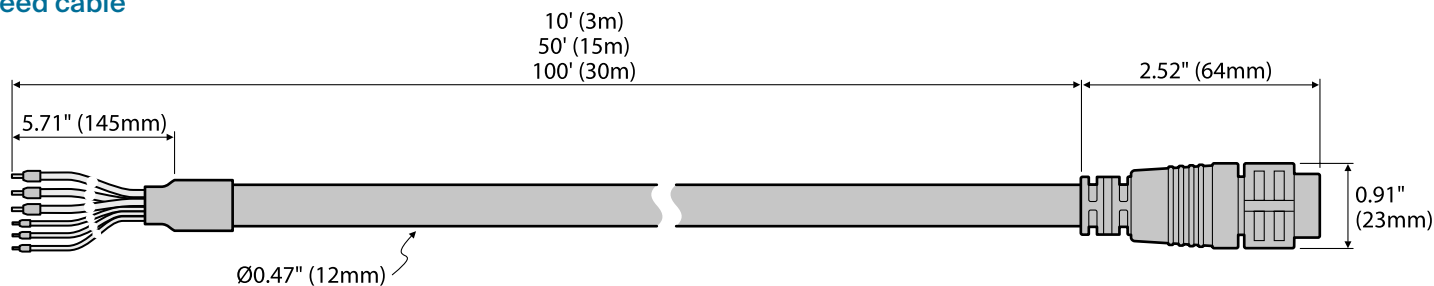

Link cable

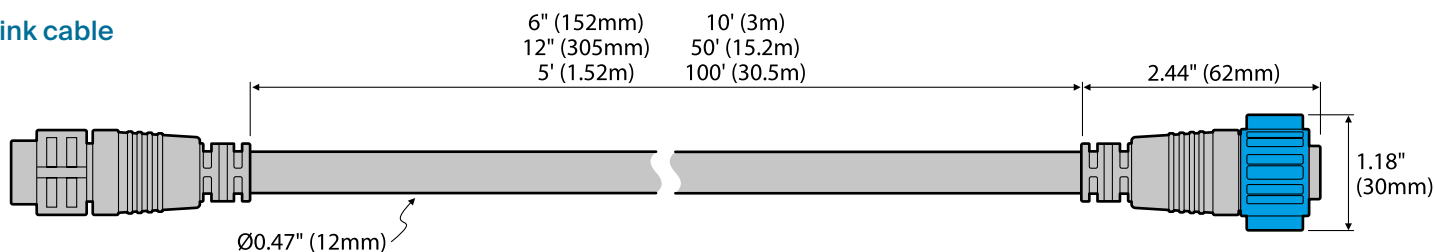

Terminator (end cap)



PROJECT

FIRM


ORDER #

TYPE

QTY

Dimensions

AJBOX1

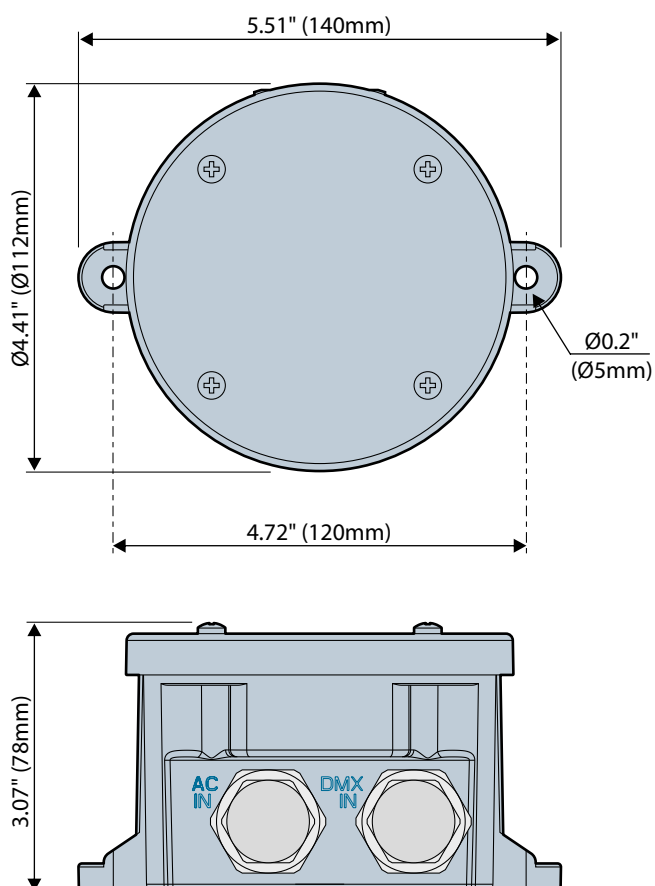

PROJECT

FIRM

ORDER #

TYPE


QTY

Using other control inputs

Linear XTR DV fixtures use DMX as their native control method, however, it is possible to use other common control protocols when required, such as 0-10V (source or sink) or DALI.

Control inputs via converters


- DMX - connect a DMX input directly to the feed cable.
- 0-10V (single) - use an Acclaim Lighting UDM to convert and merge a single analog control channel into a DMX feed.
- 0-10V (multiple) - use an Acclaim Lighting ZDM 6 to convert one or more analog control feeds into a combined DMX feed.
- DALI - use an Acclaim Lighting DDC-1-AC to convert one or more DALI channels into a combined DMX feed.

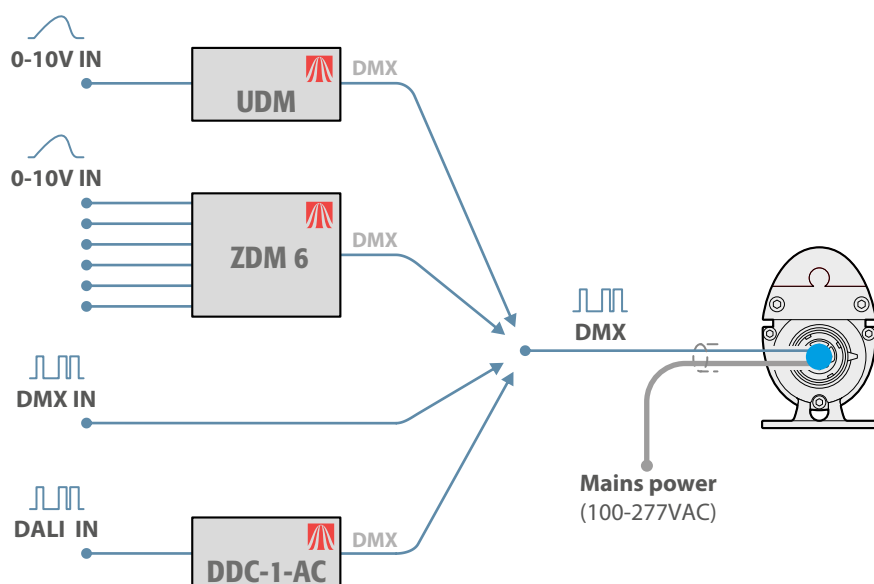

When using Acclaim Lighting ZDM 6 or DDC-1-AC modules it is possible to convert multiple inputs into separate DMX channels within a consolidated feed - thus allowing multiple Linear XTR fixtures to be uniquely addressed. The ZDM 6 can convert up to six 0-10V inputs into DMX channels, whereas the DDC-1-AC can convert a maximum of 64 DALI channels (although large numbers of channels are not recommended due to the timing limitations of the DALI standard).

Control inputs via an XTR Driver

The XTR Driver 4000 and 8000 units can accept DMX, 0-10V or DALI control inputs directly. The latter two methods are converted within the driver before being transmitted as DMX within the consolidated output, together with the high voltage XTR power.

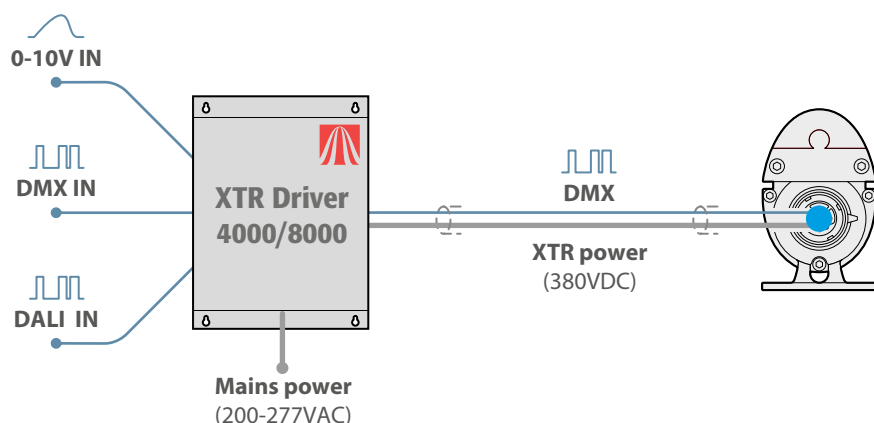

When using an XTR Driver, the internal conversion supports either a single 0-10V feed or a single 'broadcast' DALI channel - meaning that all Linear XTR fixtures will use the same single control address. To benefit from multiple channels, use a ZDM 6 or DDC-1-AC to externally convert signals (see above).



PROJECT

FIRM

ORDER #

TYPE

QTY

Unique addressing under DMX control

1' (305mm) Linear XTR DV

Emitter options	DMX channels used	Total channels per fixture	Maximum unique fixtures
	▶ Cell 1		
W	1	1	512
DW	2	2	256
RGBW/A	4	4	128

The maximum number of fixtures that can be uniquely addressed in a run is determined by the length, emitter type and operation mode of each linear fixture, as summarized in the tables shown here.

Additionally, any number of fixtures in a run can be configured to use duplicate control addresses, as required.


4' (1220mm) Linear XTR DV (operating in '1 Group' mode)

Emitter options	DMX channels used	Total channels per fixture	Maximum unique fixtures
	▶ All cells combined		
W	1	1	512
DW	2	2	256
RGBW/A	4	4	128

4' (1220mm) Linear XTR DV (operating in '4 Group' mode)

Emitter options	DMX channels used				Total channels per fixture	Maximum unique fixtures
	▶ Cell 1	Cell 2	Cell 3	Cell 4		
W	1	1	1	1	4	128
DW	2	2	2	2	8	64
RGBW/A	4	4	4	4	16	32

Important cabling considerations

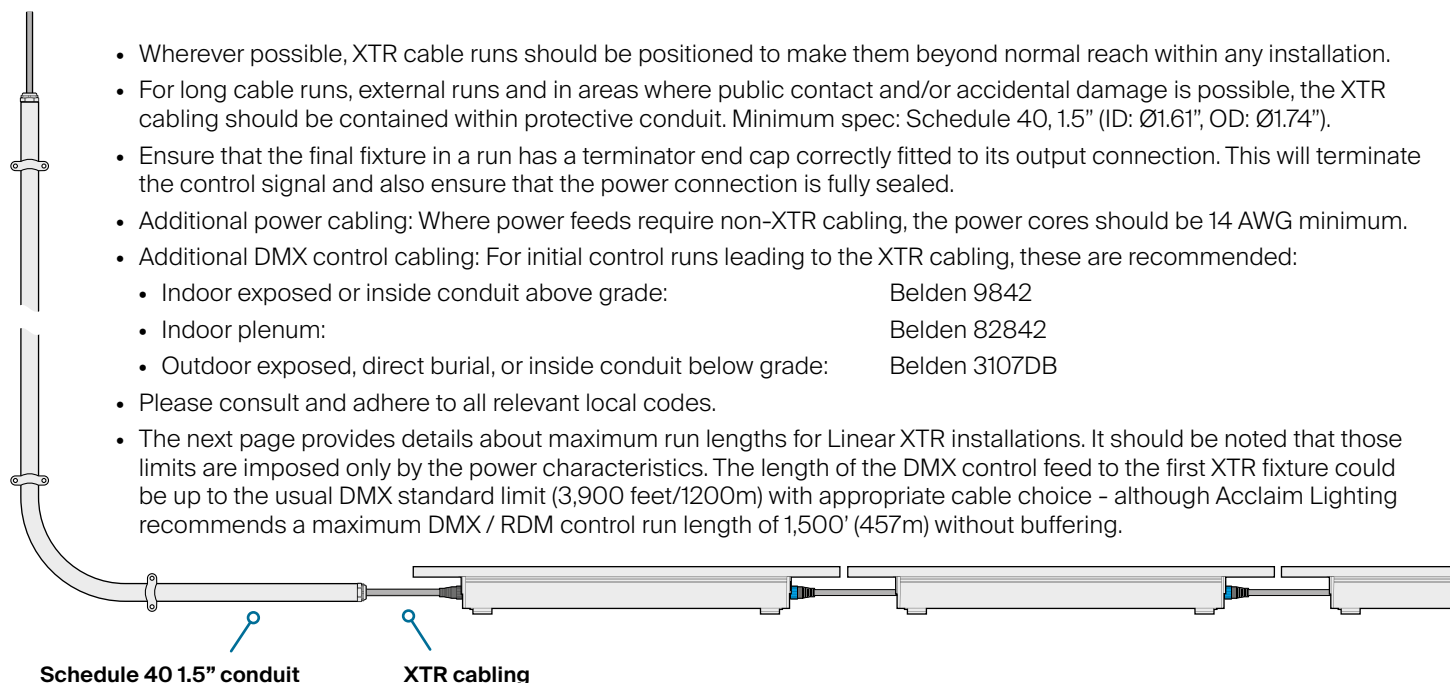

- Wherever possible, XTR cable runs should be positioned to make them beyond normal reach within any installation.
- For long cable runs, external runs and in areas where public contact and/or accidental damage is possible, the XTR cabling should be contained within protective conduit. Minimum spec: Schedule 40, 1.5" (ID: Ø1.61", OD: Ø1.74").
- Ensure that the final fixture in a run has a terminator end cap correctly fitted to its output connection. This will terminate the control signal and also ensure that the power connection is fully sealed.
- Additional power cabling: Where power feeds require non-XTR cabling, the power cores should be 14 AWG minimum.
- Additional DMX control cabling: For initial control runs leading to the XTR cabling, these are recommended:
 - Indoor exposed or inside conduit above grade: Belden 9842
 - Indoor plenum: Belden 82842
 - Outdoor exposed, direct burial, or inside conduit below grade: Belden 3107DB
- Please consult and adhere to all relevant local codes.
- The next page provides details about maximum run lengths for Linear XTR installations. It should be noted that those limits are imposed only by the power characteristics. The length of the DMX control feed to the first XTR fixture could be up to the usual DMX standard limit (3,900 feet/1200m) with appropriate cable choice - although Acclaim Lighting recommends a maximum DMX / RDM control run length of 1,500' (457m) without buffering.

Schedule 40 1.5" conduit **XTR cabling**

PROJECT

FIRM

ORDER #


TYPE

QTY


Run lengths

Linear XTR DV fixtures can be fed directly from a suitably protected mains supply (100 to 277VAC 50/60Hz) to provide standard run lengths up to 400' (122m). Alternatively, an Acclaim Lighting XTR Driver can create an increased supply voltage to allow continuous runs up to 700' (213m). *Note: Linear XTR DV fixtures can use either power method without any reconfiguration; voltage levels are automatically detected.*

Standard run lengths: Mains input plus AJBOX1 and feed cable

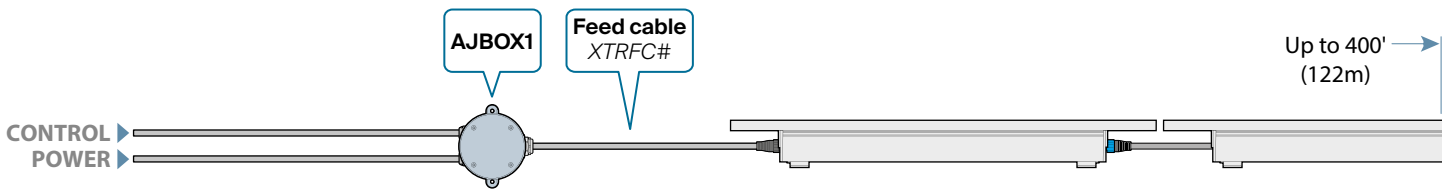

Extended run lengths: XTR Driver plus link cable

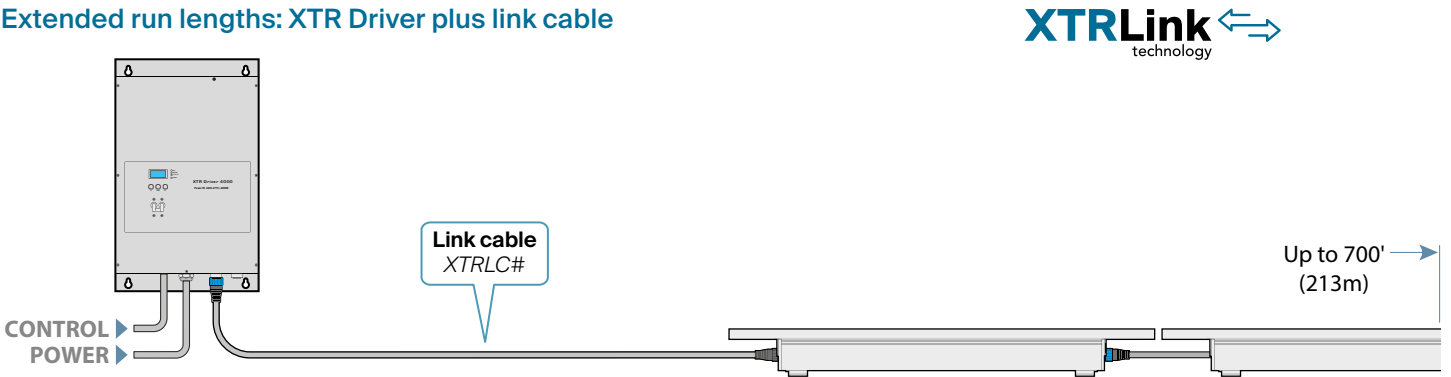

Maximum length of fixtures in a single run (all fixtures controlled within a single DMX universe)

	Power draw	100/120VAC supply	230/277VAC supply	XTR Driver 4000	XTR Driver 8000
LO	2.5 per foot	200' (61m)	400' (122m)	700' (213m)	2x 700' (213m)
EO	5W per foot	200' (61m)	400' (122m)	700' (213m)	2x 700' (213m)
SO	12W per foot	100' (30.5m)	200' (61m)	300' (91.5m)	2x 300' (91.5m)

Maximum overall length of a single run (fixtures + all cabling) (all fixtures controlled within a single DMX universe)

	100/120VAC supply	230/277VAC supply	XTR Driver 4000	XTR Driver 8000
All models	200' (61m)	400' (122m)	800' (243m)	2x 800' (243m)

Behaviors if the control signal is lost or not applied

- If the DMX control signal is not present while power is applied, the fixtures will respond in the following ways:
- Single color versions - when DMX is lost (or not used), each fixture will go to full output until the control signal is restored. If power is cycled while the control signal is absent, each fixture will remain at full until the signal is restored. If 100% output is required at all times during normal operation, this feature allows the fixtures to be fed with power only, without need for a control input.
 - Dynamic white, RGBW and RGBA versions - when DMX is lost, each fixture will hold the last received values until the control signal is restored. If power is cycled while the control signal is absent, each fixture will retain the last received values until the signal is restored.

For full installation details, please refer to the **user guide**, available for free download here: