

Flex Step Channel



Client:

Project:

Type:

Order Code:

Quantity:


The **Flex Step Channel** is an anodized aluminum channel for stair illumination. It provides a simple way to add LED Flex products directly to stair applications, without the need for custom sections or cutouts.

Compatible with: Flex II Interior

Specifications

| | |
|------------------|---|
| Length | 3.28' (1m), Cut to length as needed |
| Material | Double Anodized Aluminum, Polycarbonate Lenses |
| IP Rating | IP22, Dry Location |
| Area Temperature | 32° F - 104° F (0° C - 40° C) |
| Warranty | 3 Years |
| Mounting | via Appropriate Mounting Screws for Surface (by others) |
| Weight | 3.1 lbs. (1.4 kg) |
| Dimensions | L: 39.3" (1m) W: 3.19" (8.1cm) H: 1.57" (4cm) |

Dimensions

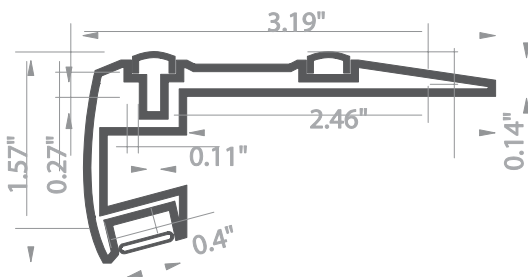

Flex Step Channel

Order Code


FLK STP: Flex Step Channel Extrusion, 1m (3.28')

Related Components

FLK MFC: Clear Lens 1m (3.28')



FLK MFL: Frosted Lens 1m (3.28')



FLK STP ECR: End Cap Right



FLK STP ECL: End Cap Left

