APS-240-24







3.27 x 4.92 x 4.57"

(E

Convection

| Client: | |
|-------------|--|
| Project: | |
| Туре: | |
| Order Code: | |
| Quantity: | |

The APS-240-24 is a 240W / 10A, 24VDC, DIN rail mount power supply. They are cULus approved, feature a convection cooled design, and are designed to work with all 24VDC fixtures from Acclaim.

Specifications

| AC Input Voltage Range | 93 - 132 / 186 - 264VAC, Single Phase, Auto Select |
|-------------------------------|--|
| DC Output Voltage | 24VDC (Adjustable from 22.5 to 28.5VDC) |
| DC Output Wattage | 240W |
| DC Output Current | 10A |
| Input Frequency | 47 - 63Hz |
| Inrush Current | 30A / 60A (115 / 230VAC) |
| Output Voltage Accuracy | -0, +1% of Nominal |
| Ripple and Noise (20MHz BW) | 100mV |
| Over Current Protection (Typ) | 110 - 145% |
| Over Voltage Protection | 30-34VDC |
| Rating | Dry Location Use Only |
| Compatible DIN Rails | TS35/7.5 or TS35/15 |
| Housing Material | Powder Coated Aluminum, Blue Finish |
| Operating Temperature | -40 to +71°C |
| Storage Temperature | -40 to +85°C |
| Warranty | 2 Year Limited Warranty |
| Weight | 2.2 lbs. (1 kg) |
| | |

Dimensions (in)

Certifications


Cooling

APS-240-24



Order Codes


• Indicates Special Order

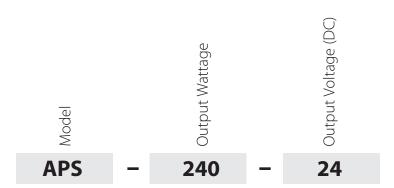


Compatible Products

Flex Tube SC Flex Tube RGB Flex III AL Dome AL Graze DC

Dimensions





Wiring

