


APS-30-24™



Client:

Project:

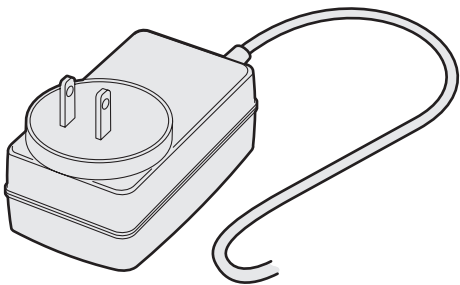


Type:

Order Code:

Quantity:

The **APS-30-24** is a high performance AC to 24VDC transformer, for use with low voltage Flex products. They are compliant with Efficiency Level VI requirements per U.S. Dept. of Energy, and heavy industrial levels of various EN61000-4-x standards for EMC.

SPECIFICATIONS

Input Voltage	100-240VAC, 50/60Hz
Output Voltage	24VDC
DC Output Wattage	30W maximum
DC Output Current	1.33A maximum
Input Frequency	50/60 Hz
Input Current	1.2A (115VAC) / 0.6A (230VAC)
Inrush Current	20A (120VAC) / 40A (240VAC)
Turn on Time	700mS maximum, 115VAC, full load
Hold up Time	20 mS
Finish	Black
Housing Material	Polycarbonate
IP Rating	IP20, Dry Location
Ambient Operating Temperature	-4° F to 158° F (-20° C to 70° C)
Cables	60" (1500mm) stripped and tinned leads
Warranty	3 Years, Limited
Weight	0.55 lbs (250g)
Dimensions	L 2.16" x W 1.32" x H 3.78" (L 55 x W 33.6 x H 96mm)
Certifications	  

APS-30-24™

ORDER CODE

Model	Wattage	DC Output Voltage
APS - 30 - 24		

Compatible with:

Flex Eco
AL Graze DC CV