

PROJECT

FIRM

ORDER #

TYPE

QTY



The **Dyna Drum™** family of floodlights has been the premier choice of serious designers for years; their high outputs, robust weather protection and unmatched reliability are legendary.


Dyna Drum E3 White models use high-CRI single color emitters to deliver intense white light over long throws. The native 5° beam can be easily modified with quick-fit spread lenses to suit wider applications.

Dyna Drum fixtures are equally happy to receive DMX control via cable or the airwaves, thanks to the Aria™ X2 wireless receiver built into every unit. A clear daylight-readable OLED touch-screen display provides access to a comprehensive configuration menu system. Alternatively, key configuration changes can be made remotely using either RDM (Remote Device Management), or via BLE (Bluetooth™ Low Energy) wirelessly from our free iOS app.

Every Dyna Drum E3 is supplied with a bare wire power/control feed cable. Dyna Drum E3 yoke mount models also benefit from an OLS connector which makes them instantly compatible with Acclaim's celebrated Outdoor Link System™ (see page 13): the rapid-fit cabling solution your installers will never want to be without.

At a glance

Optics



- 5° x 5°
- 10° x 10°, 10° x 60°
- 20° x 20°
- 40° x 40°, 30° x 60°
- 60° x 60°
- 100° x 100°

5° x 5° is the native beam.

Emitters

- 2700K or 3000K or 3500K or 4000K or 5700K



CoreSwap technology
(see page 16)

Power

100 to 277VAC
50/60Hz

Temperature

-40° F to 122° F
-40° C to 50° C

Protection

Ingress: IP67
Impact: IK10
Vibration: 3G

Output

Up to 3,900 lumens

Core technologies

OutdoorLink system
ColorDrive technology
AcclaimModular systems
aria MULTI-BAND WIRELESS CONTROL

Configure your product

DE3W -DE3E -DE3O -DE3PS

Example final code:
DE3WY1-DE3EE-DE3OK-DE3PS



Mount type:
S = 1" NPS stem mount
Y = Yoke mount

Finish color:
1 = Black (RAL 9005)
2 = White (RAL 9003)
4 = Gray (RAL 7047)
7 = Custom* (RAL #)

Emitters:
D = 2700K
E = 3000K
F = 3500K
G = 4000K
J = 5700K

Optics:
B = 5° x 5° (native)
C = 10° x 10°
D = 20° x 20°
H = 40° x 40°
K = 60° x 60°
M = 100° x 100°
Q = 30° x 60°
R = 10° x 60°

* indicates special order items, which may require longer lead times

PROJECT

FIRM

ORDER #

TYPE

QTY

Specifications

Emitters	2700K, 3000K, 3500K, 4000K, 5700K
Optics	5° native. 10° x 10°, 10° x 60°, 20° x 20°, 40° x 40°, 60° x 60°, 30° x 60° or 100° x 100°
Output	Up to 3,900 lumens
Lumen maintenance	L ₇₀ 130,000 hours (@ 25° C)
Control	0-100% dimming via wired DMX (with RDM configuration) plus built-in Aria™ X2 Wireless System
Maximum fixtures in series	32 via wired DMX. Power local to each fixture or use Acclaim's Outdoor Link System - see page 13
Operating voltage	100-277VAC, 50/60 Hz
Power consumption	50W
Connection	Stem Mount: Attached power and control cord (5 feet, 1.5m with bare wire tails) Yoke Mount: Removable power and control cord (9 feet, 2.7m) - OLS compatible (see page 13)
Mounting	Surface mount yoke or 1" NPS stem mount included, optional tenon mount or pole clamp
Effective projected area	1.01 ft ²
Material	Die cast aluminum with glass lens, marine and natatorium environment ready
Finish colors	Gray (RAL 7047), black (RAL 9005), white (RAL 9003) or custom colors (provide RAL #)
Ambient temperature range	-40° F to 122° F (-40° C to 50° C)
Ingress protection	IP67, wet location (temporary submersion up to 1m for 30 minutes)
Impact protection	IK10, protection against 20 joule impact (40cm distance).
Vibration protection	ANSI C136.31, 3G-rated for high vibration and bridge applications
Surge protection	Built-in 10kV, 5kA I _n , 10kA I _{max} protection
Warranty	5 years, limited
Weight	9 lbs (4.08 kg)
Dimensions	See page 9
Certifications	    

Welcome to the Dyna Drum family...

... where consistent emitter and optic options across the E3, S3 and H3 sizes allow you to precisely mix and match fixtures within any installation.

White

High CRI, high output white emitters in a range of color temperatures.

YOU ARE
HERE



E3



S3



H3

 Output	Up to 3,900 lumens	Up to 9,455 lumens	Up to 27,344 lumens
 Emitters	2700K to 5700K, high CRI - consistent across the range		
 Optics	5° to 100° beam angles - consistent across the range		

Color

Quad RGBW emitters with a choice of white color temperatures to provide superior color mixing.



E3



S3



H3

 Output	Up to 2,219 lumens	Up to 5,765 lumens	Up to 17,696 lumens
 Emitters	SpectrumFour QS, QW4 or QW6 - consistent across the range		
 Optics	8° to 100° beam angles - consistent across the range		

SCS

Individual emitters producing the narrowest beam angles for maximum punch in long-throw applications.



E3



S3



H3

 Output	Up to 2,750 lumens	Up to 5,650 lumens	Up to 17,325 lumens
 Emitters	RGBW, RGBA, RGBL or DW - consistent across the range		
 Optics	3° to 100° beam angles - consistent across the range		

PROJECT

FIRM

ORDER #


TYPE

QTY

Related components

Beam accessories

Half snoots



- Gray

Black

White

Custom*
- DE3HSG

DE3HSB

DE3HSW

DE3HSC

Barn doors



- Gray

Black

White


Custom*
- DE3BDAG

DE3BDAB

DE3BDAW

DE3BDAC

Full snoots



- Gray

Black

White


Custom*
- DE3FSG

DE3FSB

DE3FSW

DE3FSC

Spread lenses



- 10° beam

20° beam

40° beam

60° beam

100° beam

30° x 60° beam

10° x 60° beam
- DE3OC

DE3OD

DE3OH


DE3OK

DE3OM

DE3OQ

DE3OR

Wide snoots



- Gray

Black

White

Custom*
- DE3WSG

DE3WSB

DE3WSW

DE3WSC

* RAL # also required



PROJECT

FIRM

ORDER #


TYPE

QTY

Related components

Mounting accessories


Tenon mounts



2" schedule 40 (2.51", 56mm inner dia.)
 2" nominal (2", 51mm inner dia.)
 3.5" schedule 40 (4.13", 105mm inner dia.)
 4" nominal (4", 102mm inner dia.)

TM2 S40
TM2 NOM
TM4 S40
TM4 NOM

Extender arms

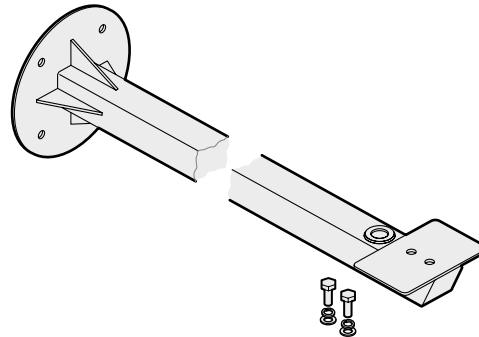


Fixture bolts and washers plus cable access seal included

	1'	2'	3'
Gray	OFLEB1G	OFLEB2G	OFLEB3G
Black	OFLEB1B	OFLEB2B	OFLEB3B
White	OFLEB1W	OFLEB2W	OFLEB3W
Custom*	OFLEB1C	OFLEB2C	OFLEB3C

*RAL # also required

Pipe clamps




2" schedule 40
 2" nominal
 4" schedule 40
 4" nominal

PC2 S40
PC2 NOM
PC4 S40
PC4 NOM


Junction boxes

AJBOX1 (IP66) junction box (plus outlet cable gland)

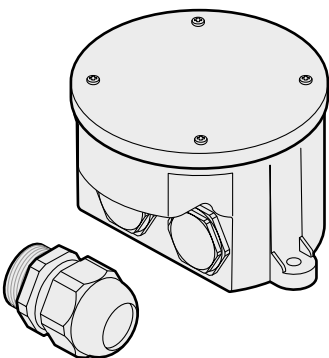

Part # **AJBOX1**
 IP66 NEC compliant high and low voltage junction box with two sealed ½" input ports for AC & DMX plus NPT ¾" output port for OLSF# feed cable. Built-in AC surge protection up to 10kV and 10kA

AJBOX1 Extended (IP66) junction box

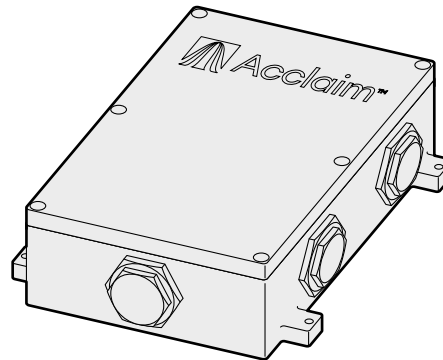

Part # **AJBOX1E#** (# = color)
 IP66 NEC-compliant high and low voltage junction box with six sealed NPT ¾" access ports for conduit fixtures or cable glands (by others) for power and control plus OLSF# feed cable. Built-in AC surge protection up to 10kV and 10kA

PROJECT

FIRM

ORDER #


TYPE

QTY

Related components


Mounting accessories

4" round box mount

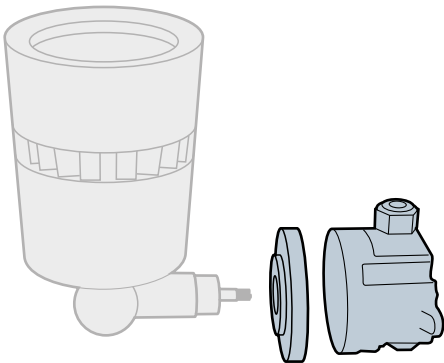


For use with Dyna Drum E3 stem mount variant **DE3EMB#**

Up / down dual head wall mount

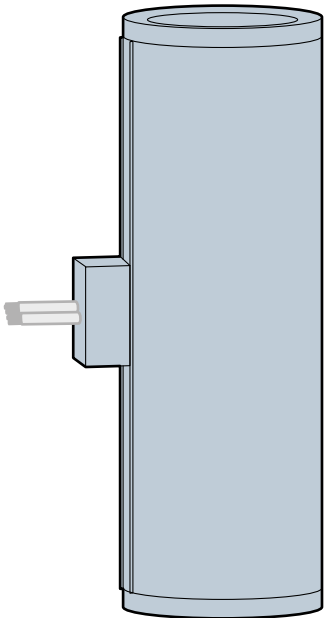


For use with Dyna Drum E3 stem mount variants **DE3DWM#**

Surface mount

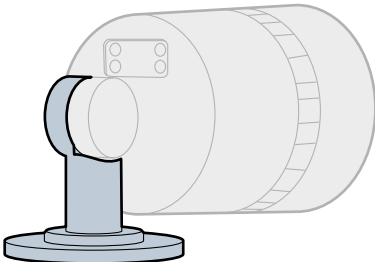

For use with Dyna Drum E3 stem mount variant **DE3SM#**

Stem mount extension

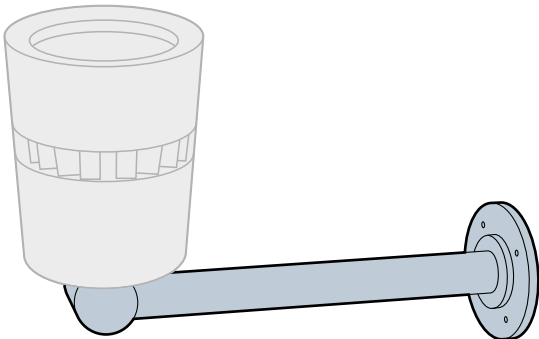

For use with Dyna Drum E3 stem mount variant

12" length

DE3SME12#

24" length

DE3SME24#



PROJECT

FIRM

ORDER #


TYPE

QTY

Related components

Outdoor Linking System - See also pages 12, 13 and 14


Feed cables

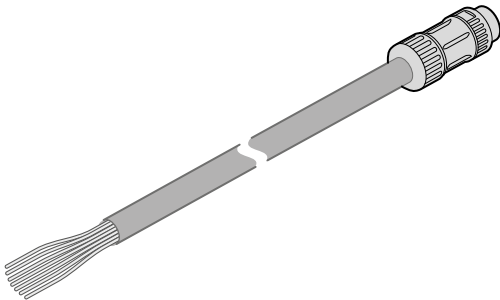

- | | |
|-------------|-------------------|
| 1' (30cm) | OLSF1#-V2 |
| 5' (1.5m) | OLSF5#-V2 |
| 10' (3m) | OLSF10#-V2 |
| 25' (7.6m) | OLSF25#-V2 |
| 50' (15.2m) | OLSF50#-V2 |

= color: G-Gray, B-Black, W-White, C-Custom (RAL# required)


Link cables

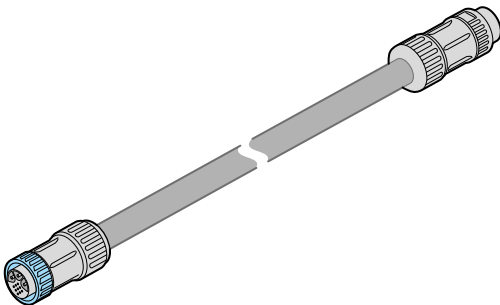

- | | |
|-------------|-------------------|
| 1' (30cm) | OLSL1#-V2 |
| 5' (1.5m) | OLSL5#-V2 |
| 10' (3m) | OLSL10#-V2 |
| 25' (7.6m) | OLSL25#-V2 |
| 50' (15.2m) | OLSL50#-V2 |


= color: G-Gray, B-Black, W-White, C-Custom (RAL# required)

End cap with DMX termination




- | | | |
|-------|----------------|-------|
| Part# | OLSEC-B | Black |
| | OLSEC-W | White |

T-junction



- | | | |
|-------|----------------|-------|
| Part# | OLST2-B | Black |
| | OLST2-W | White |

Y-junction



- | | | |
|-------|----------------|-------|
| Part# | OLSY2-B | Black |
| | OLSY2-W | White |

Note: Stem mount models, with their bare tail connections, are not directly compatible with the Acclaim Outdoor Link System.



PROJECT

FIRM


ORDER #

TYPE

QTY

Related components

Signal converters (see page 15)

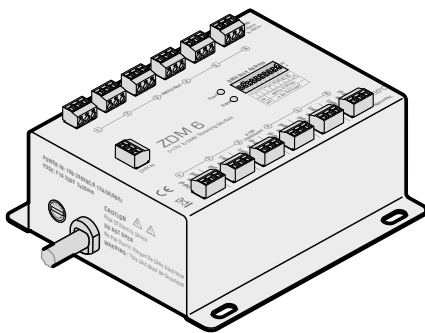


Multi-channel (0-10V) converter

ZDM6



DMXcat-E

DMX/RDM, ArtNet, sACN, SMPTE LTC and Midi test/configuration tool

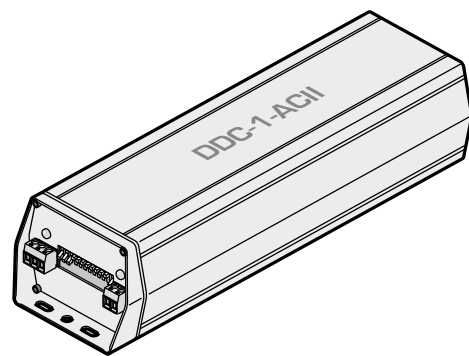

DALI multiple channel converter

DDC1AC

Wireless DMX transceiver



Aria X2 IPH multi-band wireless transceiver with two antennas, two antenna wall brackets and four U-bolts

AX2IPHT



PROJECT

FIRM


ORDER #

TYPE

QTY

Dimensions

Yoke mount model

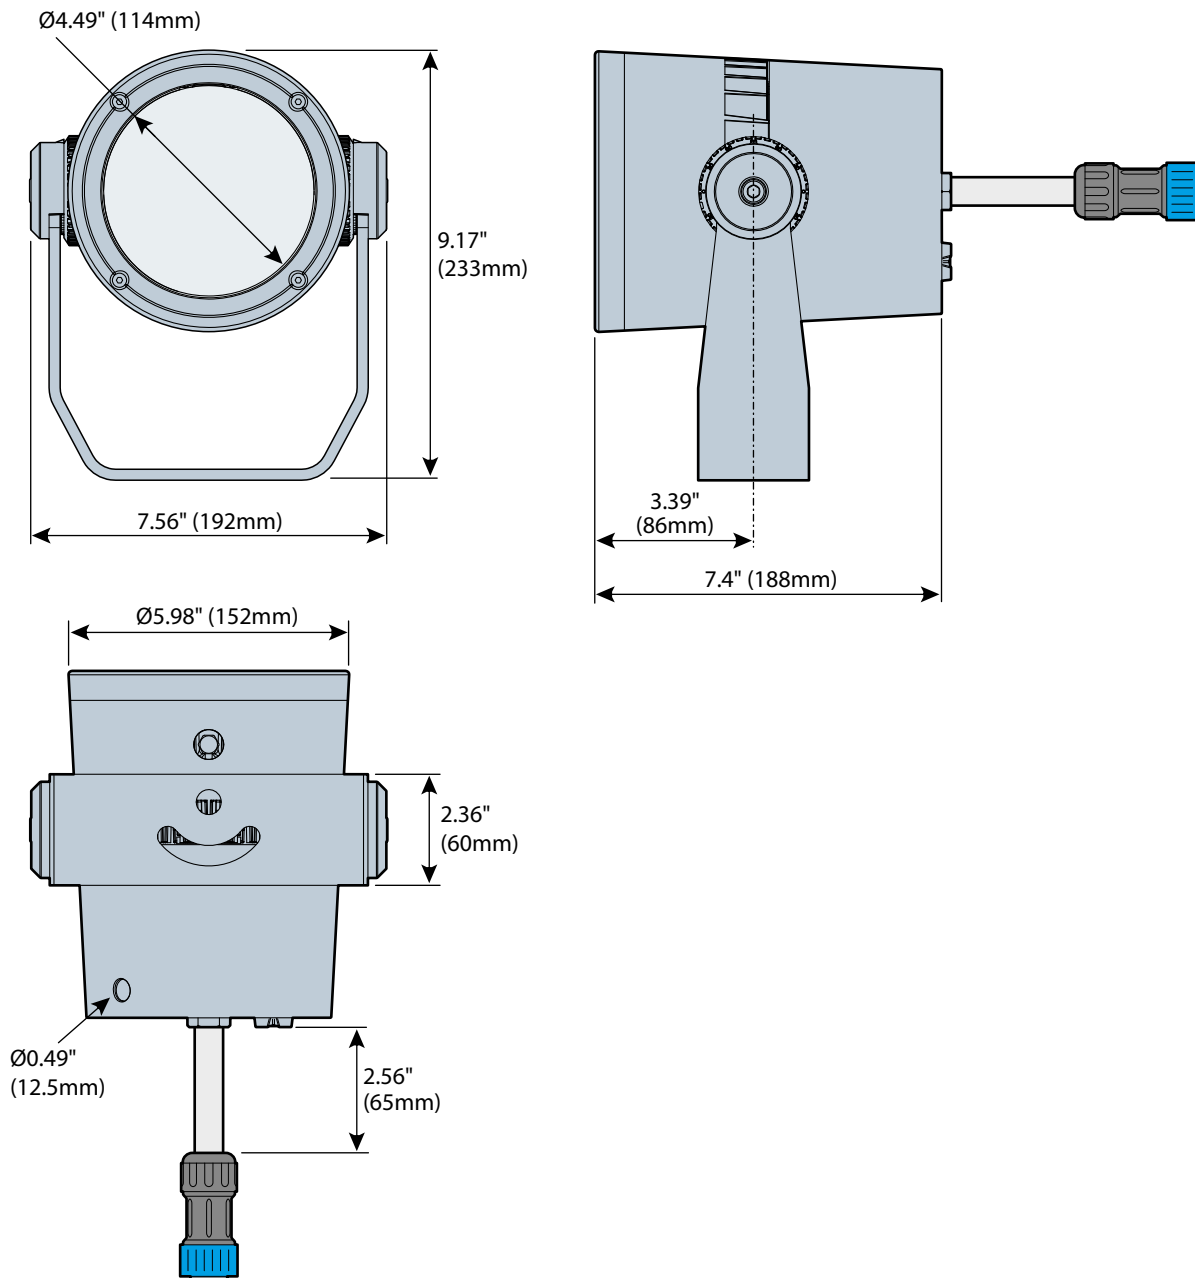

PROJECT

FIRM


ORDER #

TYPE

QTY

Dimensions

Stem mount model

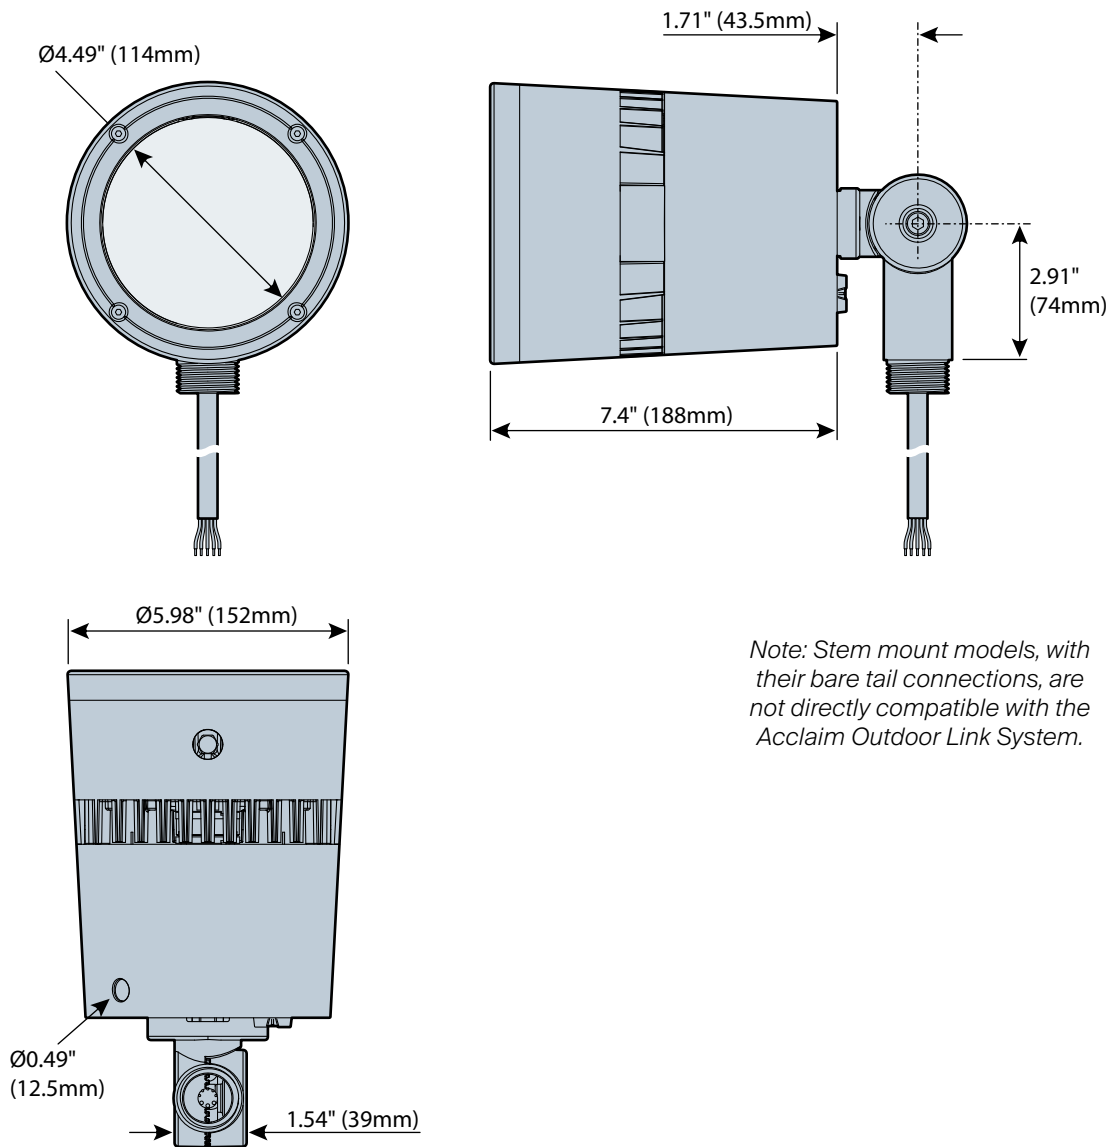

Note: Stem mount models, with their bare tail connections, are not directly compatible with the Acclaim Outdoor Link System.



PROJECT

FIRM


ORDER #

TYPE


QTY

Dimensions


Half snoot

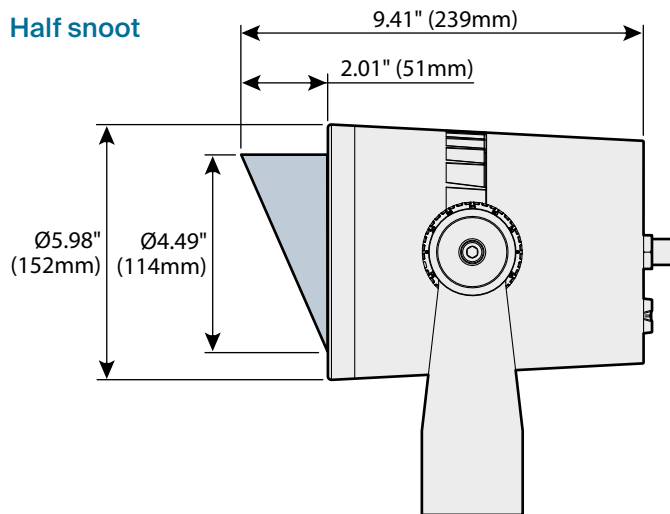

Wide snoot

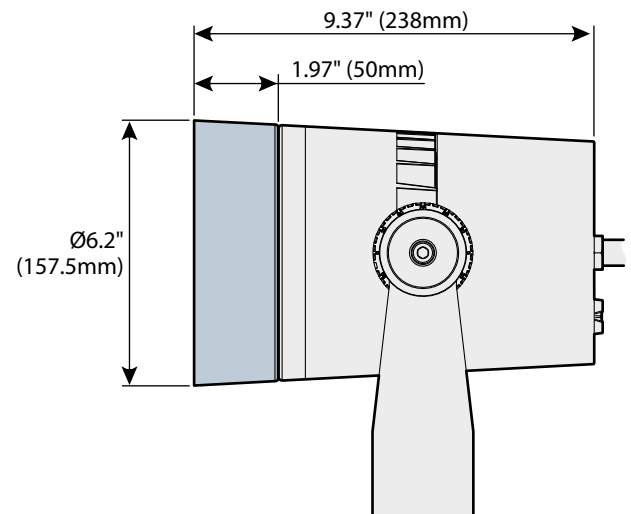

Full snoot

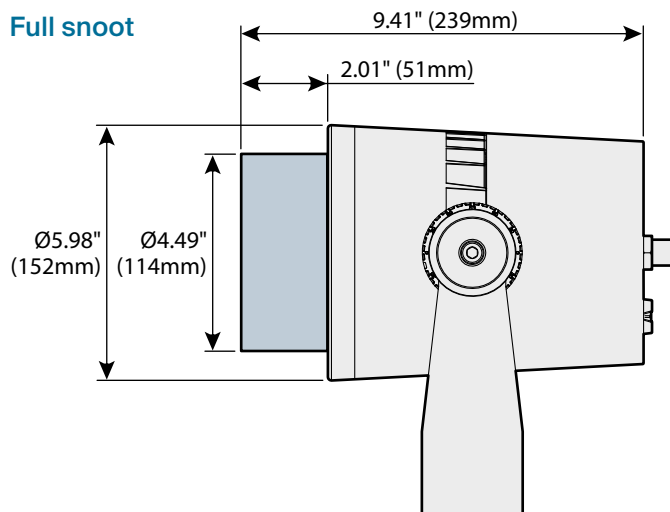SCAN
FOR
PRODUCT
PAGE

PROJECT

FIRM






ORDER #

TYPE

QTY

Dimensions - OLS items

OutdoorLink system

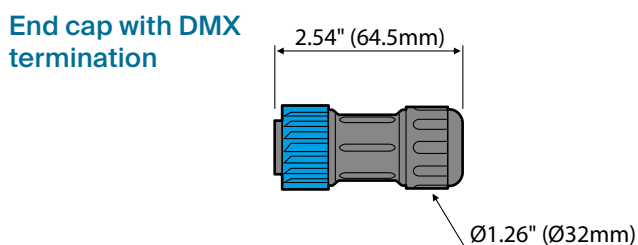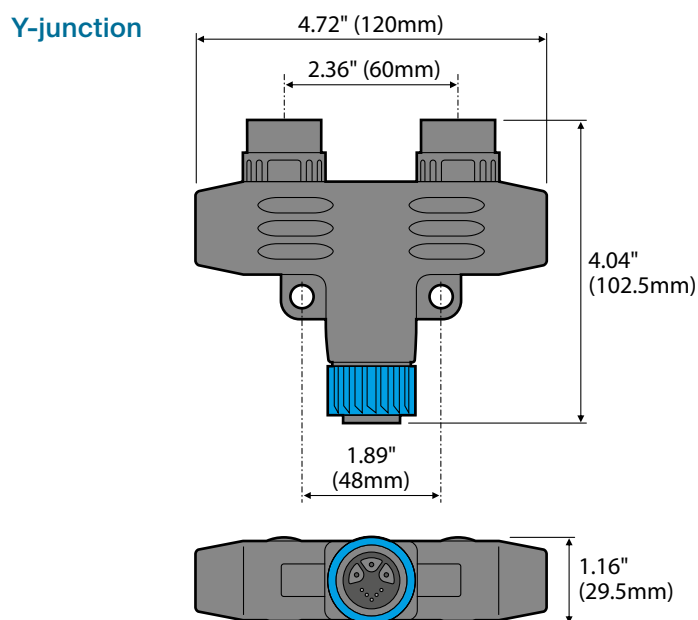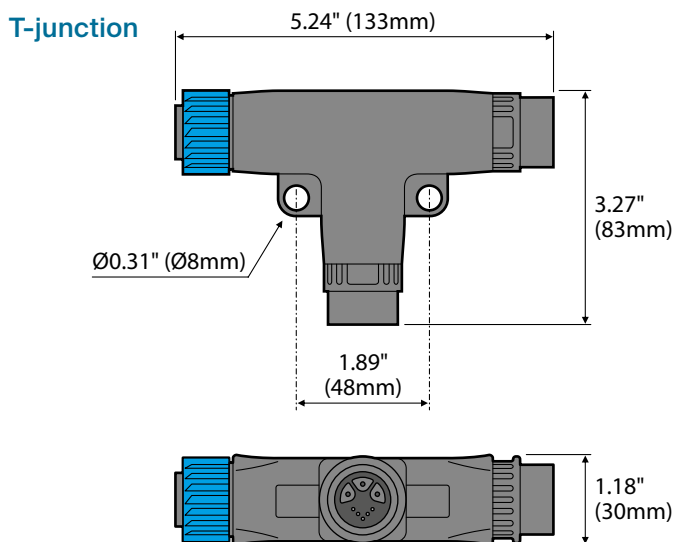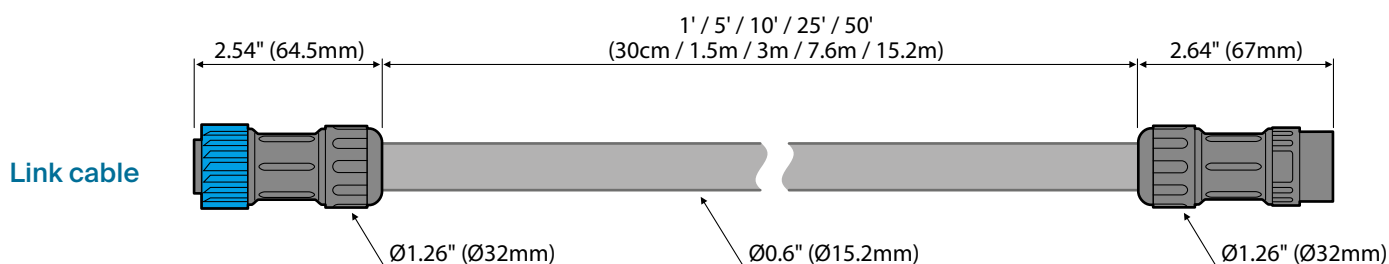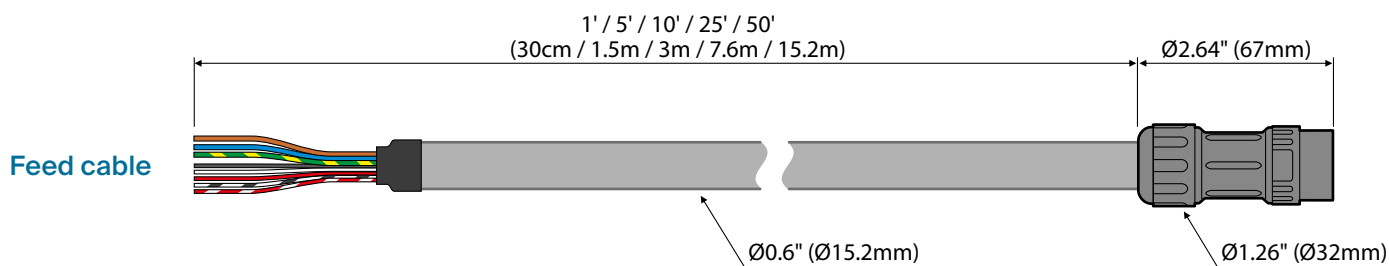

Note: Stem mount models, with their bare tail connections, are not directly compatible with the Acclaim Outdoor Link System.



PROJECT

FIRM

ORDER #


TYPE

QTY

Typical OLS configuration

The Dyna Drum E3 (yoke variant) connector is directly compatible with the Outdoor Link System, which greatly simplifies the task of distributing power and control to multiple fixtures:

OutdoorLink system

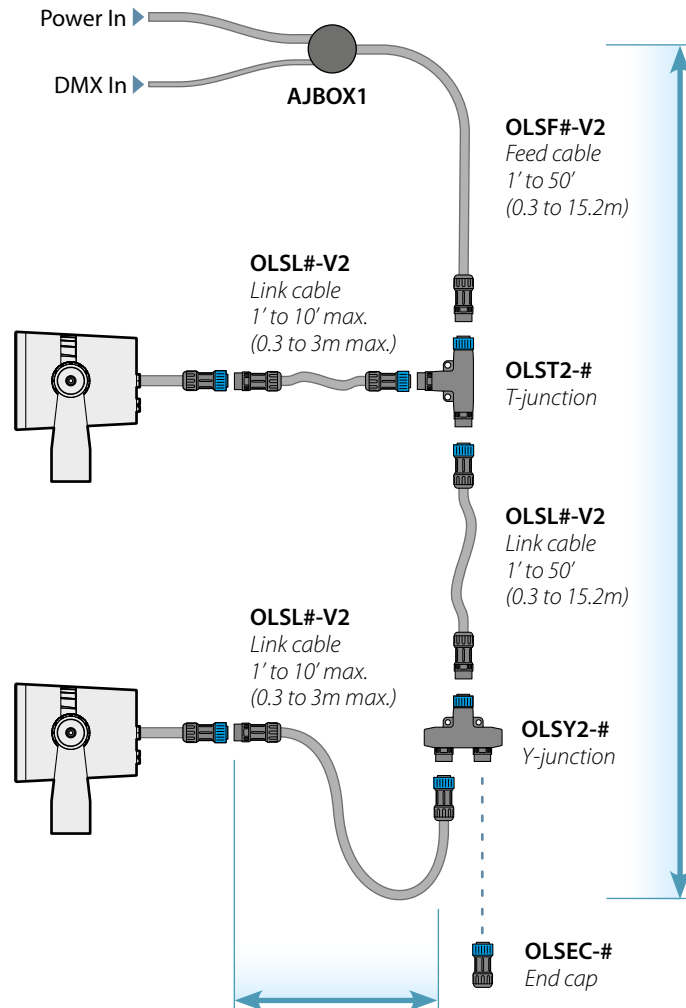

The total length from a T-junction to a fixture must not exceed 10' (3m) in length.


A terminator must be fitted to the final T-junction to simultaneously protect the live connections and correctly terminate the DMX control feed.

Maximum fixtures and cable lengths in a single OLS run:
 120VAC: 32x Dyna Drum E3 / 150'
 230VAC: 32x Dyna Drum E3 / 300'
 277VAC: 32x Dyna Drum E3 / 350'

Power and control wiring

Dyna Drum E3 models are supplied with a combined power and control cord with bare wire tails (yoke variants also have an OLS-compatible connector).

The color designations for the supplied feed in cable are as follows:

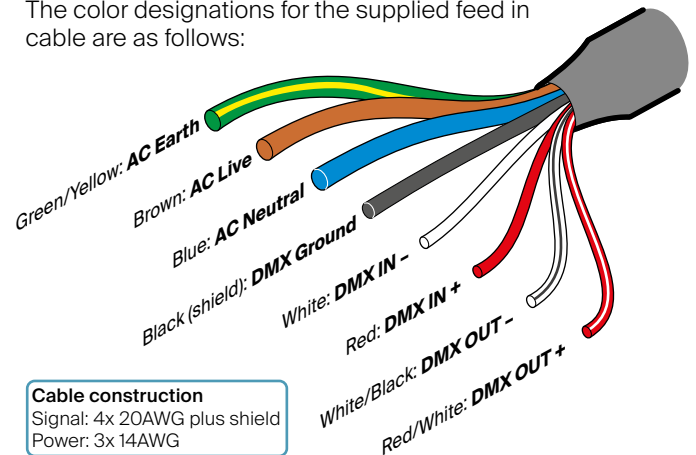

Power

The fixture power requirements are as follows:

- Voltage: 100-277VAC 50/60Hz
- Power: **50W**

Note: Acclaim recommends taking proper precautions for external surge protection, as control and power electronics can be damaged by major events. Ensure that the mains power is supplied from a suitably protected source and initial connections are made within IP rated enclosures. Acclaim recommends Belden 9842 or approved equivalent for all DMX wiring applications.

Note: The Acclaim AJBOX1 includes internal surge protection circuitry.

Control wiring

DMX cable recommendations:

- Indoor exposed or in conduit above grade: *Belden 9842*
- Indoor plenum: *Belden 82842*
- Outdoor exposed, direct burial, or inside conduit below grade: *Belden 3107DB*

Alternatives must meet **all** of the following requirements:

- Construction**
Shielded, twisted pair (or multi-pair).
- Impedance**
Between 90 and 120Ω.
- Capacitance**
15pF or less.



PROJECT

FIRM

ORDER #

TYPE

QTY

OLS connectors

The Outdoor Link System uses matching IP67-rated connectors throughout, each of which combines AC power and DMX control. A simple color code is used:

- Connectors with blue collars are inputs,
- Connectors with black collars (white option available) are outputs.

The blue collars form the locking and release mechanism ➡

Note: Stem mount models, with their bare tail connections, are not directly compatible with the Acclaim Outdoor Link System.


OutdoorLink system

To make a link

Simply align a black and a blue connector and push them together with a click.

To break a link

Twist and hold the blue collar while you withdraw the black connector.

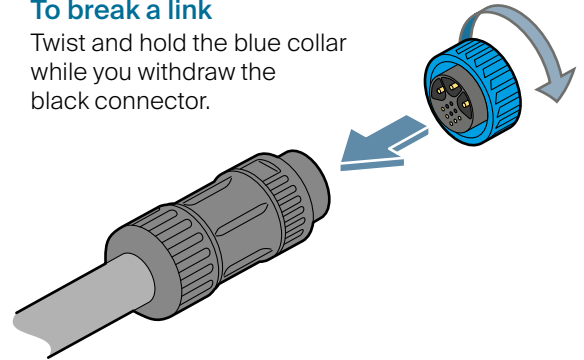


OLS Junctions

Two types of OLS junctions are available: T-junctions and Y-junctions. Electrically they are identical, they both split one input into two power/control outputs.


Y-junction

Most useful when the next fixtures are located in the same direction from the junction.

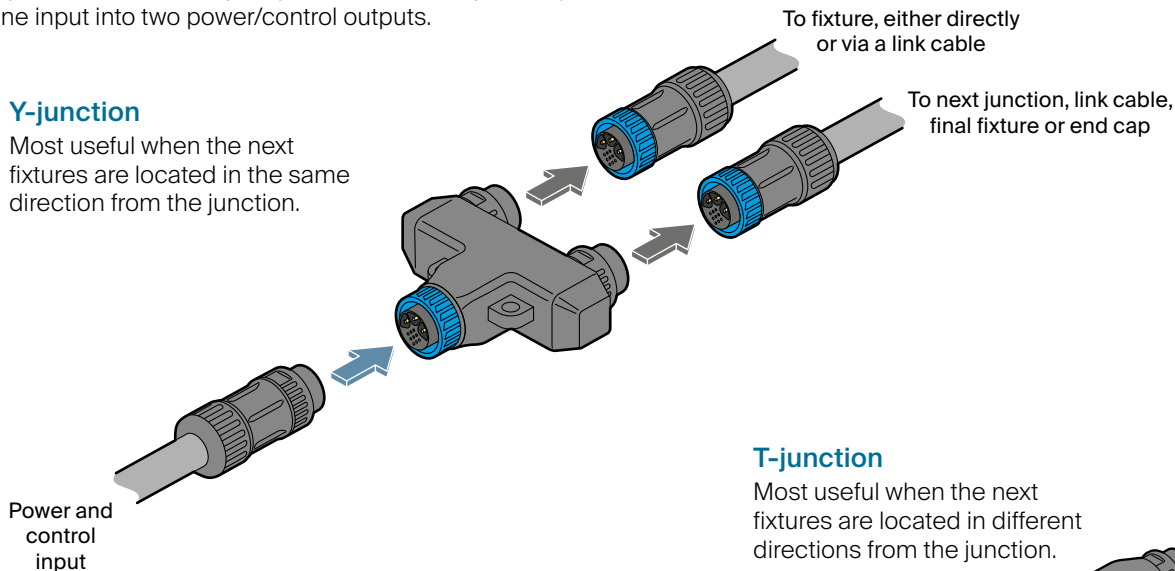

T-junction

Most useful when the next fixtures are located in different directions from the junction.

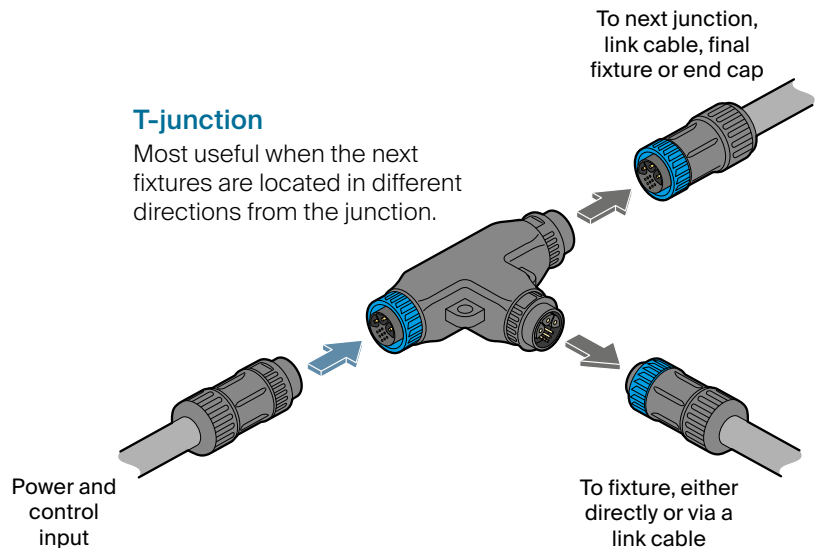


PROJECT	FIRM	ORDER #	TYPE	QTY
---------	------	---------	------	-----

Alternative control inputs

Dyna Drum E3 fixtures use DMX as their native control method, however, it is possible to use other common control protocols when required, such as 0-10V (source or sink) or DALI.

Control inputs via converters


- DMX - connect a DMX input directly to the feed cable.
- 0-10V - use an Acclaim Lighting ZDM 6 to convert one or more analog control feeds into a combined DMX feed.
- DALI - use an Acclaim Lighting DDC-1-AC to convert one or more DALI channels into a combined DMX feed.

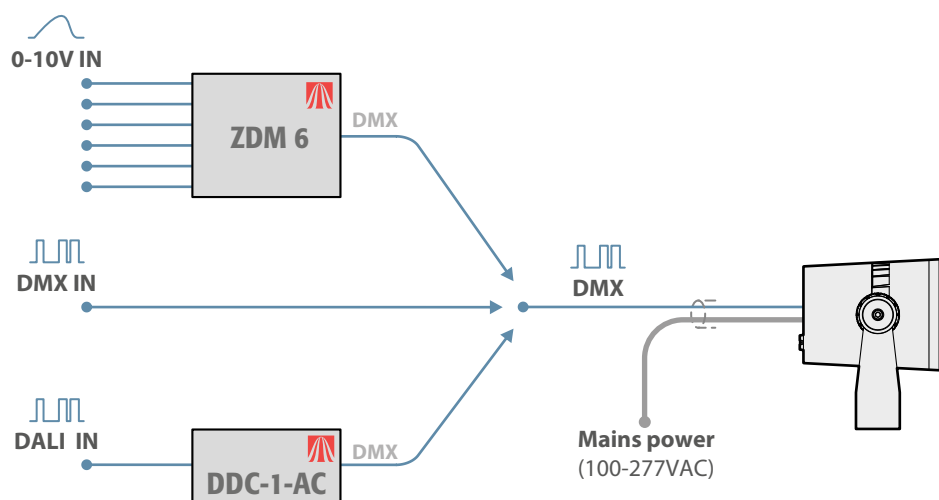

When using Acclaim Lighting ZDM 6 or DDC-1-AC modules it is possible to convert multiple inputs into separate DMX channels within a consolidated feed. The ZDM 6 can convert up to six 0-10V inputs into DMX channels, whereas the DDC-1-AC can convert a maximum of 64 DALI channels (although large numbers of channels are not recommended due to the timing limitations of the DALI standard).

Wireless DMX control

Each Dyna Drum E3 fixture contains an Aria X2 wireless DMX receiver as standard, which can greatly simplify the deployment of multiple fixtures in spaces that contain no control wiring infrastructure. A single Aria transmitter can control unlimited Dyna Drum E3 fixtures, at distances up to 2,000 feet (609m).

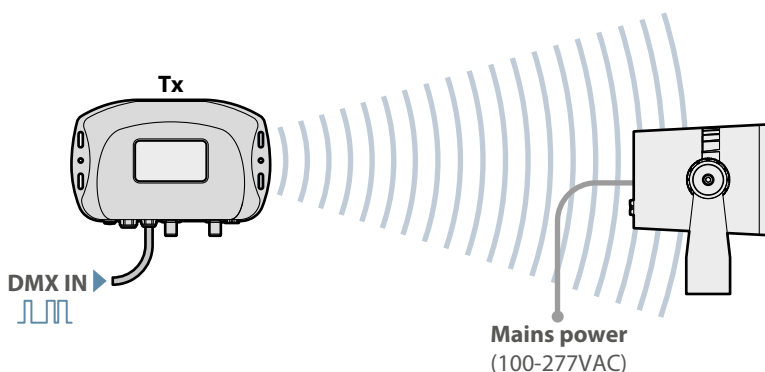

PROJECT

FIRM


ORDER #

TYPE

QTY

Modular flexibility

Like all Acclaim Lighting products, Dyna Drum E3 fixtures are designed and built for the long haul in professional environments. In the unlikely event of failure during the lifetime of a fixture, it is reassuring to know that a solution is ready to return to 100% operation in the shortest possible downtime. Our **CoreSwap Technology** ensures that only the affected module need ever be swapped out, whether that be in our service center or at your on-site installation.

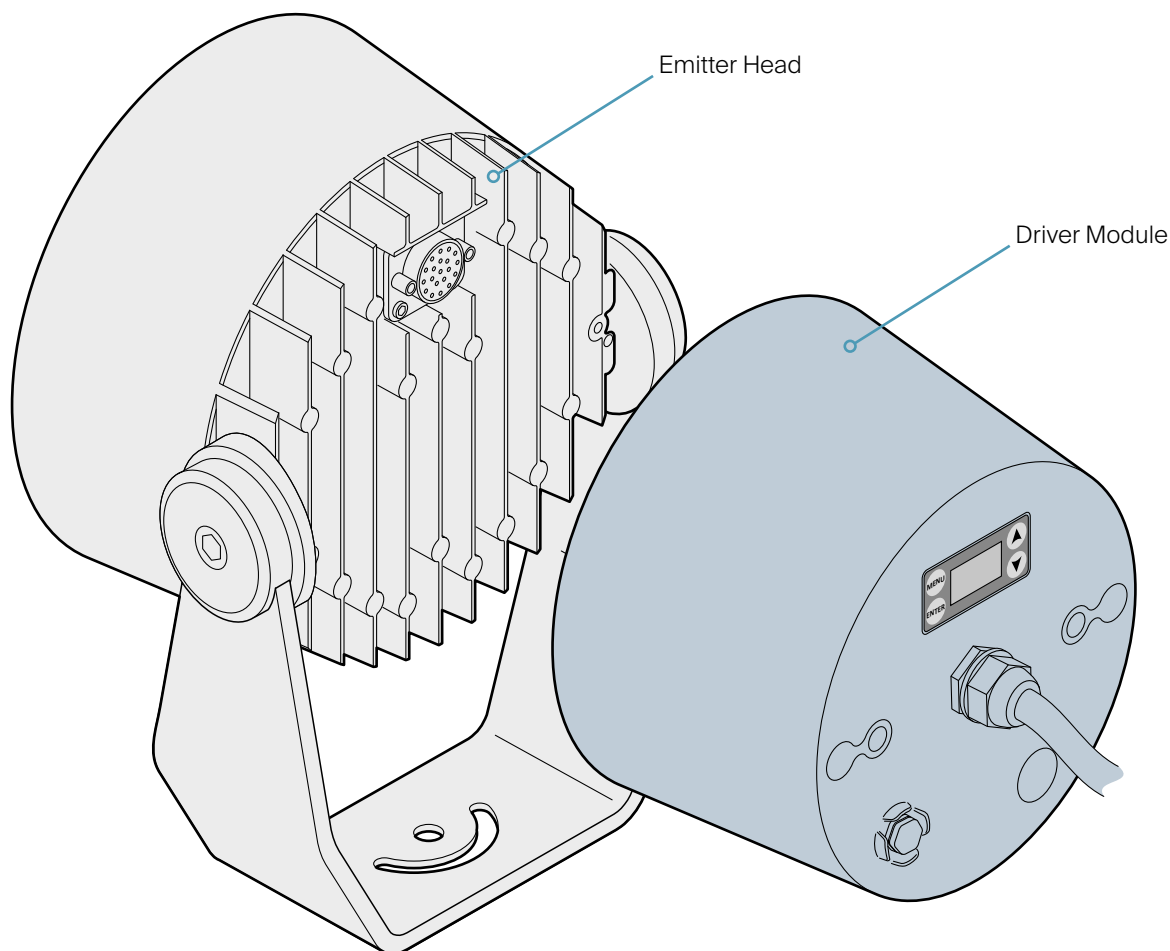CoreSwap 
technology

For full
installation
details, please
refer to the
user guide,
available for free
download here:

