


PROJECT

FIRM

ORDER #

TYPE

QTY

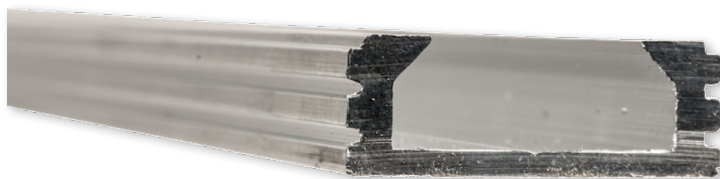

Flex Channel Low Profile is a low profile double-anodized aluminum extrusion for mounting various Acclaim flex tape products. A range of matching polycarbonate lenses, end caps and mounts are available to enable the channel to best serve different installations. The channels and lenses are available in 4' (1.21m) lengths.

At a glance



Temperature

32° F to 104° F
0° C to 40° C




Protection

IP20
Dry location



Material




Compatible with:

Flex Spectrum Interior
Ai Flex Interior & Exterior
Flex Eco Interior & Exterior
Flex One SO Interior & Exterior
Flex One HO Interior & Exterior

Order code

FLX444 4' (1.21m) length

Dimensions

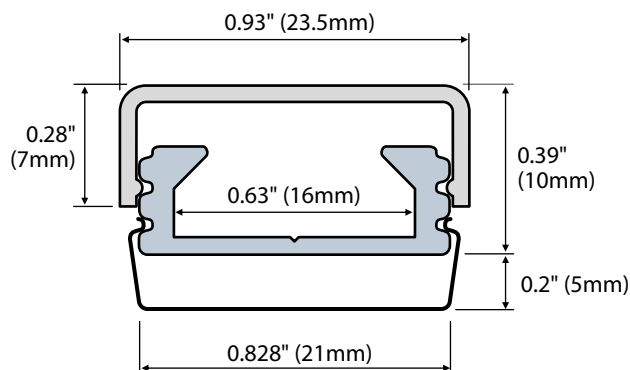

Shown with optional FLX111 mount clip



PROJECT

FIRM

ORDER #

TYPE


QTY

Specifications

Length	4' (1.21m), cut to length as required
Material	Double anodized aluminum, optional polycarbonate lenses
Ambient temperature range	32° F to 104° F (0° C to 40° C)
Ingress protection	IP22, dry location
Mounting	Via optional stainless steel mount brackets
Warranty	3 years, limited


Related components

Lenses - 4' (1.21m) in length

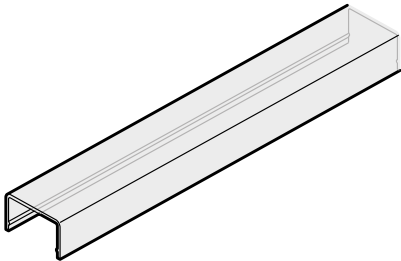


- Clear
- Frosted (50% diffusion)
- Opal (100% diffusion)
- FLX LP CL4
- FLX LP FL4
- FLX LP OL4

Mounts



Mount clip/joiner (1 pc) **FLX 111**



45° mount clip kit (2 pcs) **FLX 113**

End cap



(1 pc) **FCLPEC1**

