


PROJECT

FIRM

ORDER #

TYPE

QTY

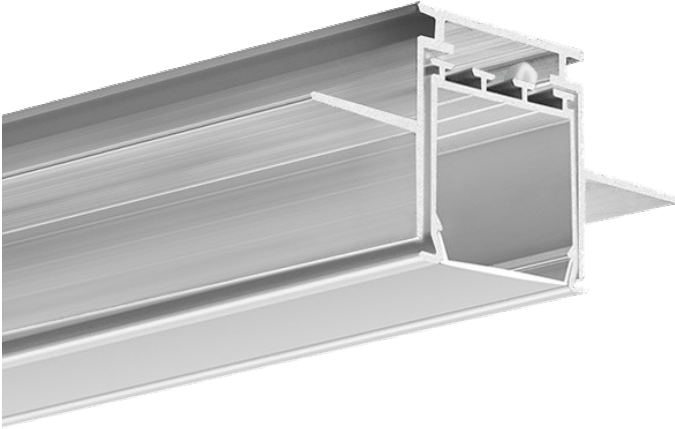

Flex Drywall Channel is a two-piece system, with anodized aluminum channel, designed for clean lines of LED installation in ½" (12.5mm) drywall ceilings and walls. Add the channel with or without a flange to the mounting section for a simple, clean LED strip.

A range of matching polycarbonate lenses and ancillary items are available to best serve different installations. Channels and lenses are available in 3.28' (1m) lengths.

At a glance



Temperature

32° F to 104° F
0° C to 40° C




Protection

IP20
Dry location



Material



Compatible with:

Flex Eco & Ai Flex Interior
Flex Spectrum Interior
Flex One SO Interior & Exterior
Flex One HO Interior & Exterior

Order codes

FLK DWM

FLK DWC

FLK DWF


Flex drywall mount extrusion 3.28' (1m) length, use with either of the following:

Flex drywall internal channel 3.28' (1m) length


Flex drywall internal channel with flange 3.28' (1m) length

Dimensions


FLK DWC



FLK DWF



FLK DWM

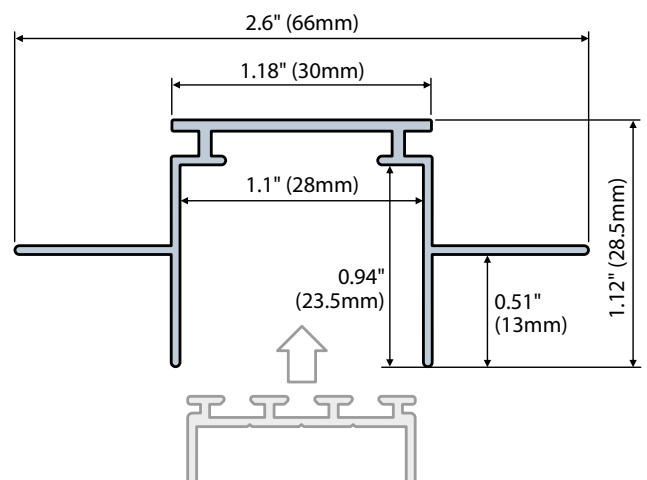

PROJECT

FIRM

ORDER #

TYPE


QTY

Specifications

Length	3.28' (1m), cut to length as required
Material	Double anodized aluminum, optional polycarbonate lenses
Ambient temperature range	32° F to 104° F (0° C to 40° C)
Ingress protection	IP22, dry location
Mounting	Via surface spring accessory
Weight	0.84 lbs (0.38 kg)
Warranty	3 years, limited

Related components


Lenses - 3.28' (1m) in length

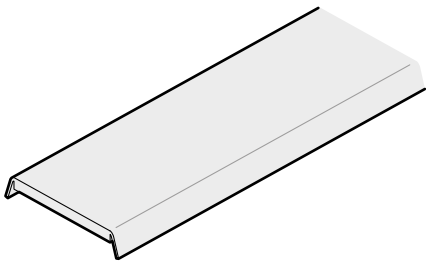

Clear
Frosted (50% diffusion)

FLK DCL
FLK DFL

Mount accessories



Surface spring


FLK DWC SS



Mounting clip


FLK DWM CLIP

End caps



Mount end cap

FLK DWM EC



Channel end cap

FLK DWC EC

