

PROJECT

 FIRM

 ORDER #

 TYPE

 QTY


**Flex Dual Channel** is a clean, anodized aluminum channel that allows you to mount up to three parallel runs of Flex tape and direct their output in opposing directions (usually up and down). Frosted polycarbonate lenses help to homogenize the output.

## At a glance



### Temperature

32° F to 104° F  
0° C to 40° C




### Protection

IP20  
Dry location



### Material




### Compatible with:

Flex Eco Interior  
Ai Flex Interior  
Flex One SO Interior  
Flex One HO Interior

## Order code

**FLK DUL** 3.28' (1m) length

## Dimensions

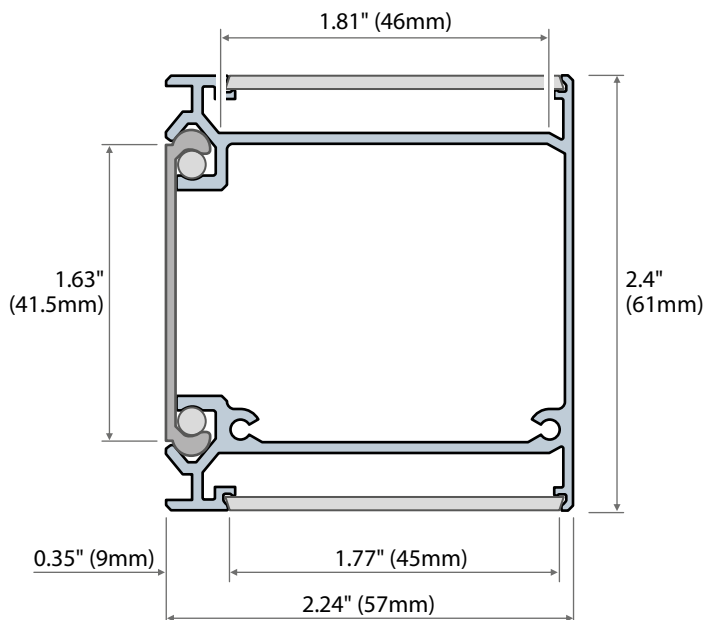

PROJECT

FIRM

ORDER #

TYPE


QTY

Specifications

Length	3.28' (1m), cut to length as required
Material	Double anodized aluminum, polycarbonate lenses
Ambient temperature range	32° F to 104° F (0° C to 40° C)
Ingress protection	IP22, dry location
Mounting	Via included mounting strip
Weight	0.45 lbs (0.204 kg)
Warranty	3 years, limited

Related components


Lens - 3.28' (1m) in length



Clear  
Frosted (50% diffusion)

FLK DUL CL  
FLK DUL FL

End caps



End cap

FLK DUL EC

