


PROJECT

FIRM

ORDER #


TYPE

QTY

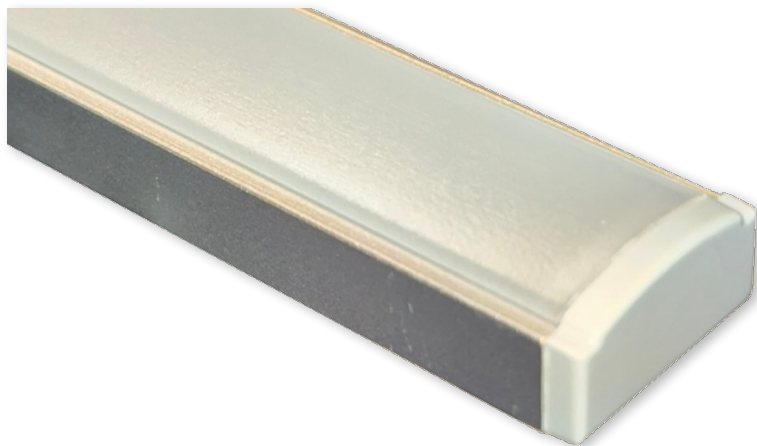

Flex Mini Channel is a low profile double-anodized aluminum extrusion for mounting interior Flex tapes with the lowest possible visual impact. A range of matching polycarbonate lenses, end caps and mounts are available to enable the channel to best serve different installations. The channels and lenses are available in 3.28' (1m) and 6.56' (2m) lengths.


At a glance

 Temperature 32° F to 104° F 0° C to 40° C	 Protection IP20 Dry location	 Material 	 Compatible with: Ai Flex Interior Flex Eco Interior Flex One SO Interior Flex One HO Interior
--	--	---	---

Order codes

FLX MIN 1M	3.28' (1m) length
FLX MIN 2M	6.56' (2m) length

Dimensions

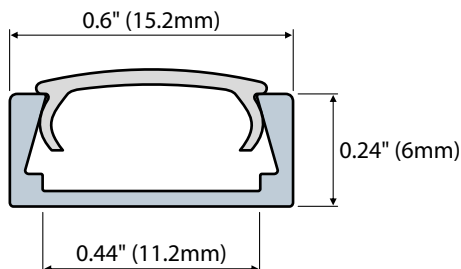

PROJECT

FIRM

ORDER #

TYPE


QTY

Specifications

Length	3.28' (1m) or 6.56' (2m), cut to length as required
Material	Double anodized aluminum, optional polycarbonate lenses
Ambient temperature range	32° F to 104° F (0° C to 40° C)
Ingress protection	IP22, dry location
Mounting	Via optional stainless steel mount brackets
Warranty	3 years, limited
Weight	0.16 lbs (72g) per 3.28' (1m) length; 0.32 lbs (144g) per 6.56' (2m) length

Related components


Lenses - 3.28' (1m) or 6.56' (2m) in length

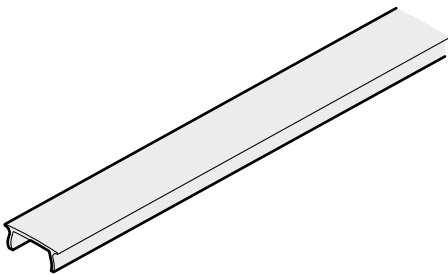

Clear
Frosted (50% diffusion)
Opal (100% diffusion)


FLX MIN CL 1M or FLX MIN CL 2M
FLX MIN FL 1M or FLX MIN FL 2M
FLX MIN OL 1M or FLX MIN OL 2M

Mount




Mount clip FLX MIN MC

End caps



Solid end cap FLX MIN EC



End cap with hole FLX MIN ECH

