

PROJECT

FIRM

ORDER #

TYPE

QTY




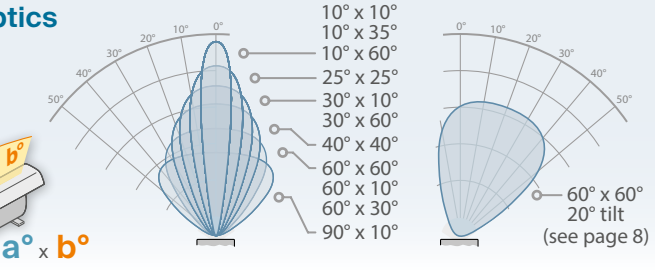
Linear XTR™ fixtures are precision engineered to deliver long runs of all-weather linear illumination. When powered by standard mains (100 to 277VAC) they can achieve daisy-chained runs of up to 400 feet (121m). However, when supplied by an optional XTR Driver, the maximum length of a single daisy-chained run can be raised to an impressive 700 feet (213m).


Available in both 1' and 4' lengths, there are numerous emitter color and power options together with an extensive range of lens choices. Optional glare shields and louvers allow the light output to be further refined to suit the scene.


Control is achieved using the industry standard DMX-512A format, with RDM for configuration. DALI and 0-10V control inputs can also be used when XTR Drivers or optional converters are employed (see page 9).


At a glance


Optics



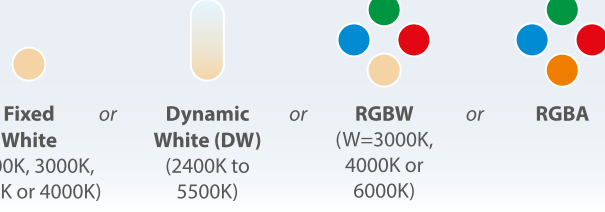

Emitters





Power


100 to 277VAC
50/60Hz
 380VDC
via XTR Driver


Temperature


-40° F to 131° F
-40° C to 55° C



Protection

Ingress: IP66
Impact: IK10
Vibration: 3G


Output

Up to 864 lumens per linear foot


Core technologies



Configure your product

XT -2 1- N

Example final code: **XTA-241-DHEN**

Power (/ ft):
A = SO 12W
C = EO 5W
L = LO 2.5W

Finish:
1 = Black* (RAL 9005)
2 = White* (RAL 9003)
4 = Aluminum
7 = Custom* (RAL #)

Length:
A = 1' (305mm)
D = 4' (1220mm)

Optics:
C = 10° x 10°
F = 25° x 25°
H = 40° x 40°
I = 30° x 10°
J = 60° x 10°
K = 60° x 60°
L = 100° x 100°
T = Asymmetric Wall Wash Left
60° x 60°, 20° tilt
X = Asymmetric Wall Wash Right
60° x 60°, 20° tilt
U = 10° x 35°
R = 10° x 60°
Q = 30° x 60°
Y = 60° x 30°
Z = 90° x 10°

Emitters:
D = 2700K*
E = 3000K
F = 3500K*
G = 4000K
X = DW (2400K - 5500K)*
Q = QS (RGBW, W=3000K)
R = QW4 (RGBW, W=4000K)
S = QW6 (RGBW, W=6000K)
U = RGBW, W=3000K
V = RGBW, W=4000K
W = RGBW, W=6000K*
T = RGBA*

Optics T and X: Tilt directions as viewed from the input end of the fixture - see page 8

* indicates special order items, which may require longer lead times



PROJECT

FIRM

ORDER #

TYPE

QTY

Specifications

Emitters	2700K, 3000K, 3500K, 4000K, DW (2400K-5500K), RGBW (W=3000K, 4000K or 6000K), Quad-color (Spectrum 4) RGBW (W=3000K, 4000K or 6000K) or RGBA
Optics	10° x 10°, 25° x 25°, 40° x 40°, 30° x 10°, 60° x 10°, 60° x 60°, 100° x 100°, 10° x 35°, 10° x 60°, 30° x 60°, 60° x 30°, 90° x 10° or Asymmetric wall wash (60° x 60°, 20° tilt) - see page 8
Output	SO: up to 864 l/ft (white), EO: up to 449 l/ft (white), LO: up to 89 l/ft (white)
Lumen maintenance	L ₇₀ 150,000 hours (@ 25° C)
Control	0-100% dimming via wired DMX (with RDM configuration). 0-10V and DALI via XTR Driver <i>Single color models will default to 100% (on/off) output if the control input is absent (see page 11).</i>
Maximum fixtures in series	Up to 700' (213m) via XTR Driver 4000 /8000 (See page 11)
Housing lengths	1' (305mm) or 4' (1220mm)
Operating voltage	100-277VAC, 50/60Hz direct or 380VDC via XTR Driver 4000/8000 (200-300VAC input to XTR Driver)
Power consumption	SO: 1': 12W 4': 48W, EO: 1': 5W 4': 20W, LO: 1': 2.5W 4': 10W
Connection	Composite IP68-rated input and output connectors. All cables are NEC compliant
Mounting	Two built-in ratcheted (tool-free) swivel mount brackets
Material	Aluminum body with PMMA top lens
Finish	Finished aluminum, black (RAL 9005), white (RAL 9003) or custom colors (provide RAL #) Optional marine coating available
Ambient temperature range	-40° F to 131° F (-40° C to 55° C)
Ingress protection	IP66, wet location
Impact protection	IK10, protection against 20 joule impact (40cm distance)
Vibration protection	ANSI C136.31, 3G-rated for high vibration and bridge applications
Warranty	5 years, limited
Weight	1': 1.6 lbs (0.72 kg) 4': 6.2 lbs (2.81 kg)
Dimensions	LxWxH: 12 or 48" x 1.77" x 2.51" (305 or 1220 x 45 x 64mm) - see page 5

Certifications



Photometrics

For all available IES files, please visit acclaimlighting.com/linear-xtr

Color or color temperature	Lumens (/ft)	Max Candela	Efficacy (lm/W)	CRI (Ra)	TM30
3000K (SO, 1ft, 10° x 60°)	732	2,018	61	84.2	85.1
4000K (SO, 1ft, 10° x 60°)	864	2,528	71	81.6	83.7
RGBW (SO, 1ft, 10° x 60°)	419	1,264	32	80.5	83.2
DW (SO, 1ft, 10° x 60°)	617	4,056	45	75	77
3000K (EO, 1ft, 10° x 60°)	359	1,009	80	84.4	85.0
4000K (EO, 1ft, 10° x 60°)	449	1,451	76	81.8	84.3
RGBW (EO, 1ft, 10° x 60°)	192	840	32	80.5	83.2
DW (EO, 1ft, 10° x 10°)	210	2,057	42	75	76

PROJECT

FIRM

ORDER #


TYPE

QTY

Related components

Optional mounting accessories

Extender bars

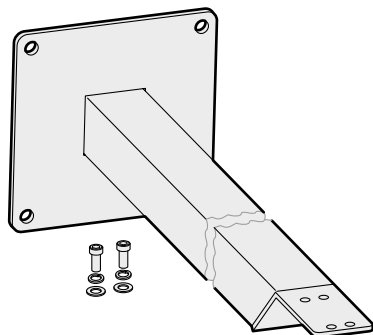


6"
1'
2'
3'

XTREB05
XTREB1
XTREB2
XTREB3

Optional beam accessories


Single-sided glare shields

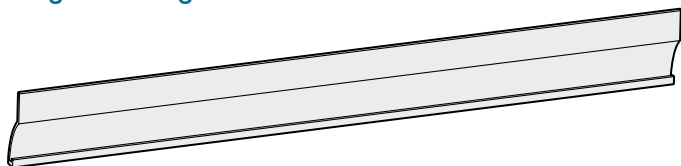

1'
4'

XTRGS1
XTRGS4

Full louvers

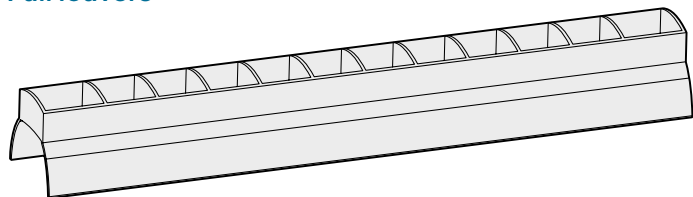

1'
4'


XTRLV1
XTRLV4

XTR Drivers (optional for extended run lengths)

- Power input: 200 to 300VAC
- Control input: DMX/RDM, 0-10V sink or DALI

XTR Driver 4000


- Up to 4000W power consumption
- Maximum of 1x 700' Linear XTR run*

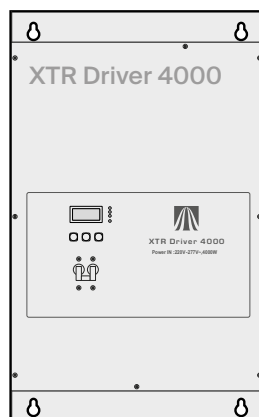

Part # **XTR Driver 4000**

XTR Driver 8000

- Up to 8000W power consumption
- Maximum of 2x 700' Linear XTR runs*

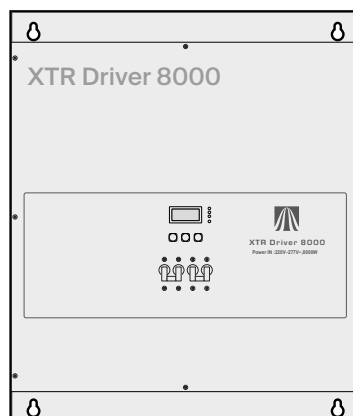

Part # **XTR Driver 8000**

** All fixtures controlled within a single DMX universe*



PROJECT

FIRM


ORDER #

TYPE

QTY


Related components

Feed cables (inc terminator)

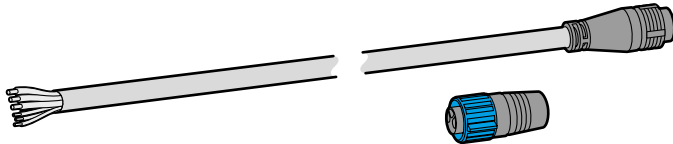


10' (3m) **XTRFC10**
 50' (15m) **XTRFC50**
 100' (30m) **XTRFC100**

Link cables

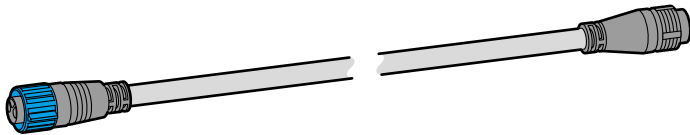


6" (15cm) **XTRLC0.5**
 1' (30cm) **XTRLC1**
 5' (1.5m) **XTRLC5**
 10' (3m) **XTRLC10**
 50' (15m) **XTRLC50**
 100' (30m) **XTRLC100**

Terminator (end cap)




Terminator **XTRECT**

IP66 junction box (plus outlet cable gland)

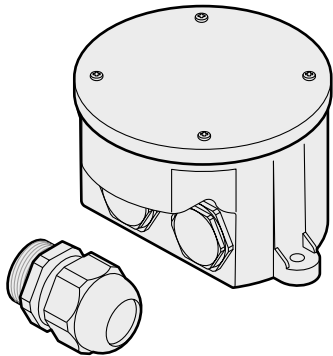


Part # **AJBOX1**
 IP66 NEC compliant high+low voltage junction box
 1/2" conduit inputs for AC + DMX, 3/4" conduit for XTRFC#
 Built-in AC surge protection up to 10kV & 10kA
 Suitable for 120-277VAC runs. Not certified for use with XTR Drivers

Signal protocol converters (see page 9)

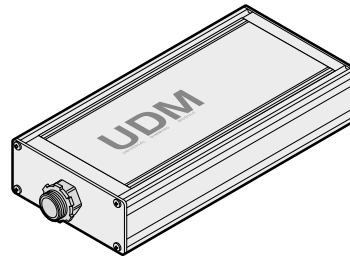


0-10V single channel converter

UDM



0-10V multiple channel converter


ZDM 6

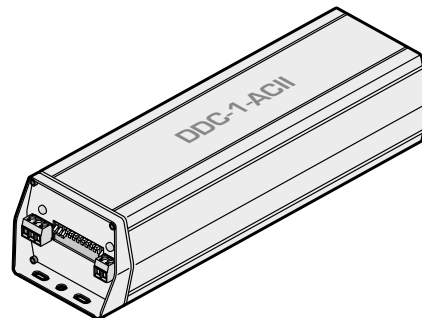

DALI multiple channel converter

DDC 1 AC

Test and configuration tool kit

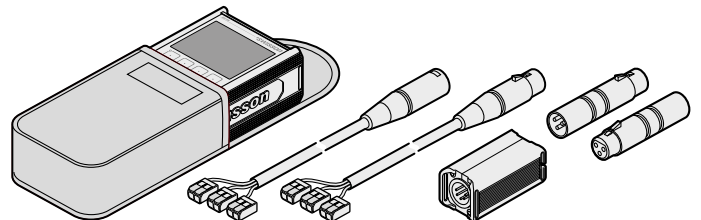

XMT-500

DMX/RDM, ArtNet and sACN test/configuration tool with cable dangle, 3/5-pin converters, bare cable connectors and pouch

PROJECT





FIRM

ORDER #


TYPE

QTY


Dimensions

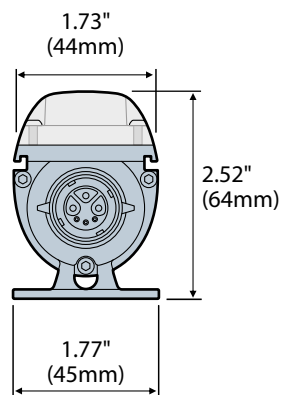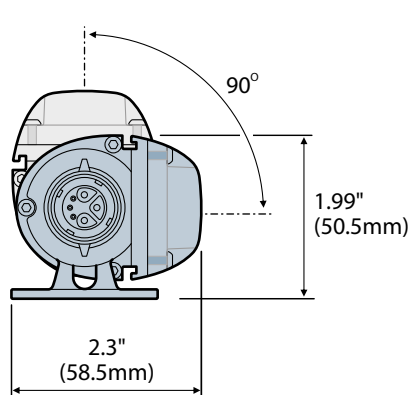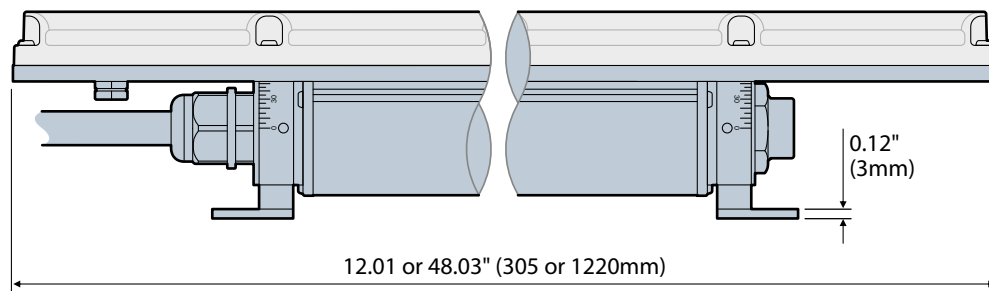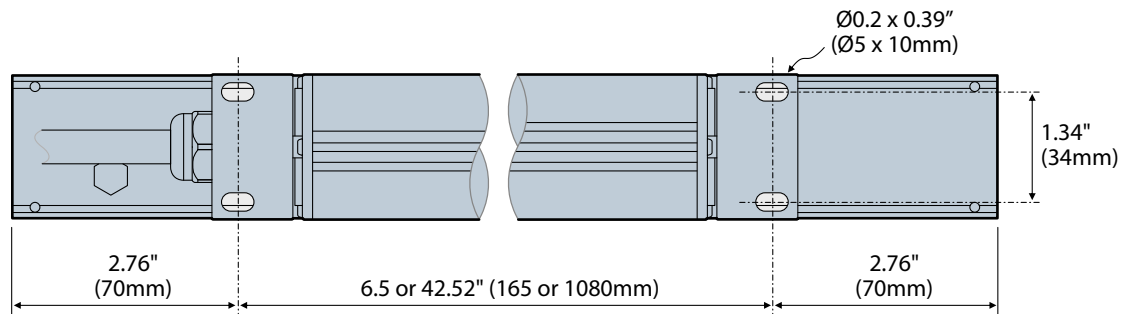

with optional glare shield



with optional louver



PROJECT

FIRM


ORDER #

TYPE

QTY


Dimensions

Optional extender bars

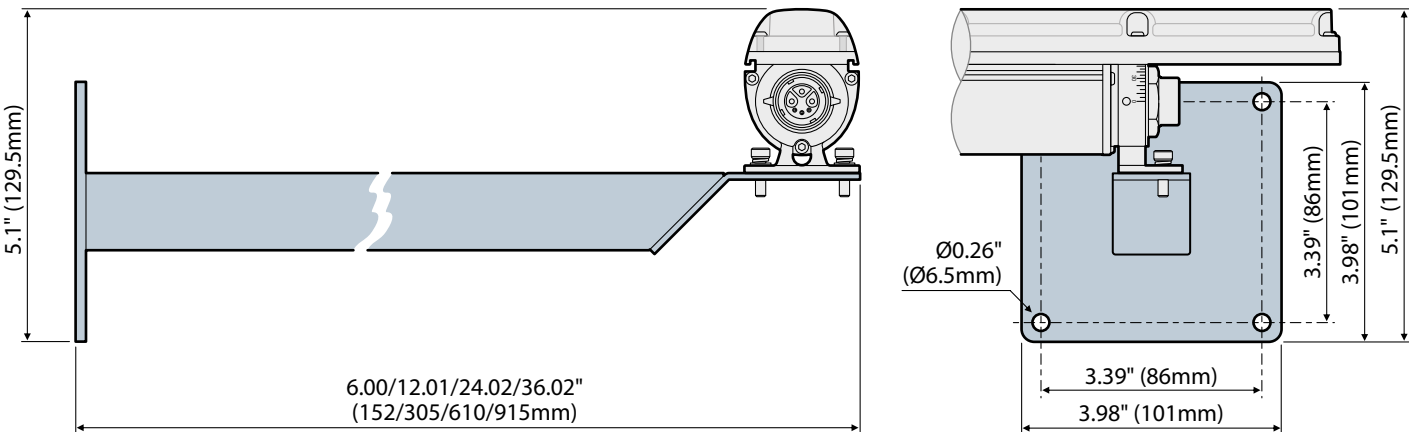


Cables


Feed cable

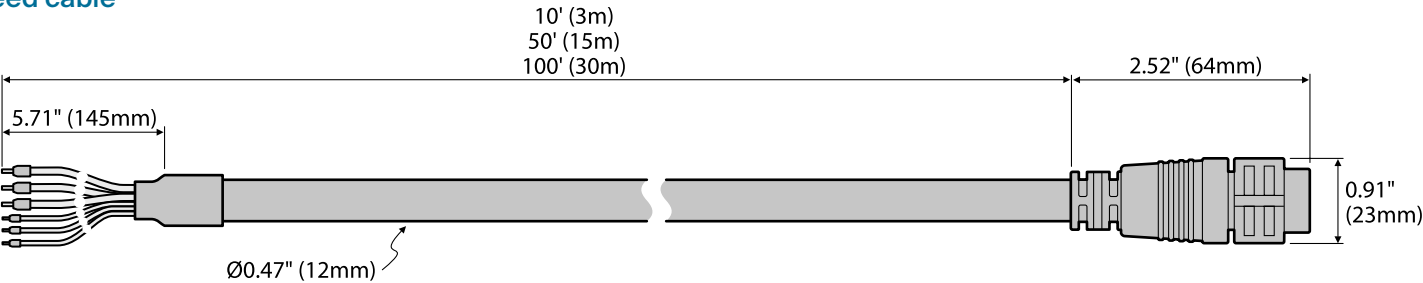

Link cable

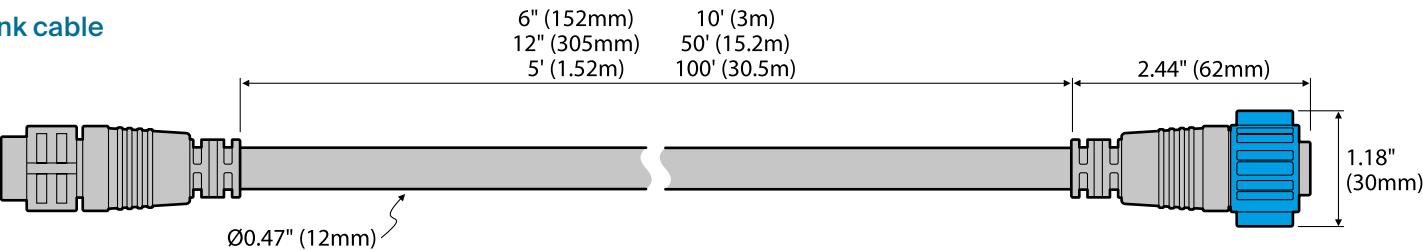


Terminator (end cap)



PROJECT	FIRM	ORDER #	TYPE	QTY
---------	------	---------	------	-----

Dimensions

AJBOX1

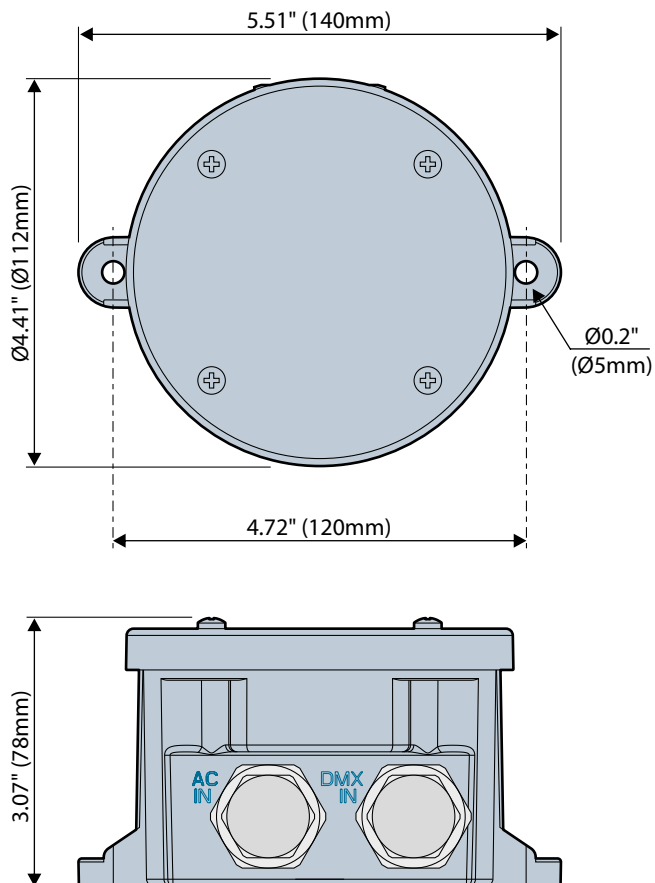

PROJECT

FIRM

ORDER #



TYPE

QTY



Asymmetric wall wash lens options

Two special lens options are available, both of which provide a 20 degree side-bias to the direction of the emitted output. Both lens options produce a 60 x 60 degree main beam angle; the difference is whether those beams are biased to the left or to the right of the fixture, in relation to the feed in connection.

Asymmetric Wall Wash Right (60° x 60° with 20° tilt)

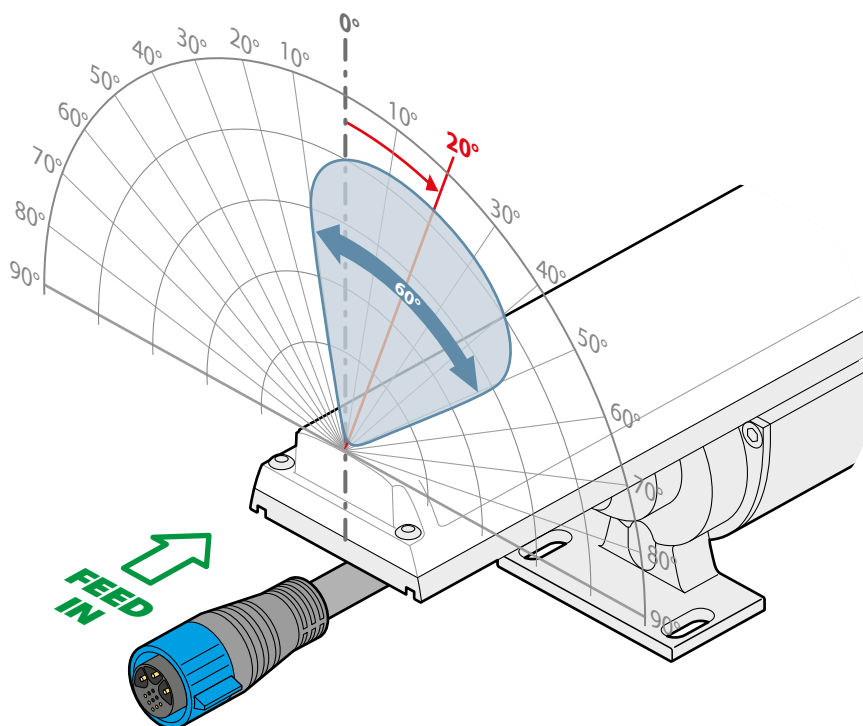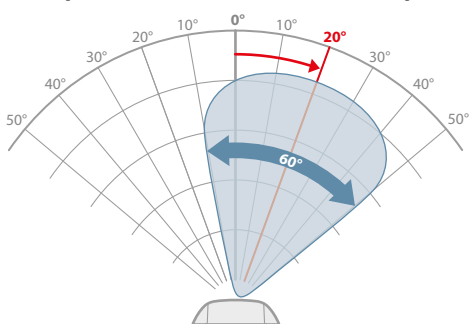

Asymmetric Wall Wash Left (60° x 60° with 20° tilt)

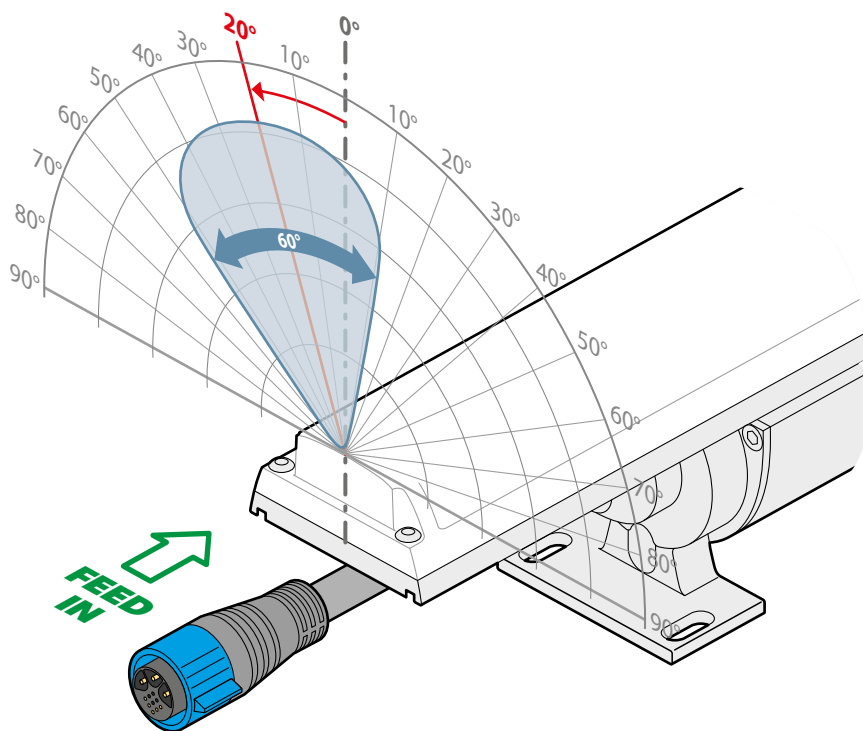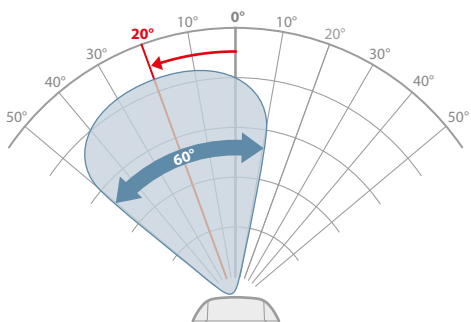

PROJECT

FIRM

ORDER #

TYPE


QTY

Using other control inputs

Linear XTR fixtures use DMX as their native control method, however, it is possible to use other common control protocols when required, such as 0-10V (source or sink) or DALI.

Control inputs via converters


- DMX - connect a DMX input directly to the feed cable.
- 0-10V (single) - use an Acclaim Lighting UDM to convert and merge a single analog control channel into a DMX feed.
- 0-10V (multiple) - use an Acclaim Lighting ZDM 6 to convert one or more analog control feeds into a combined DMX feed.
- DALI - use an Acclaim Lighting DDC-1-AC to convert one or more DALI channels into a combined DMX feed.

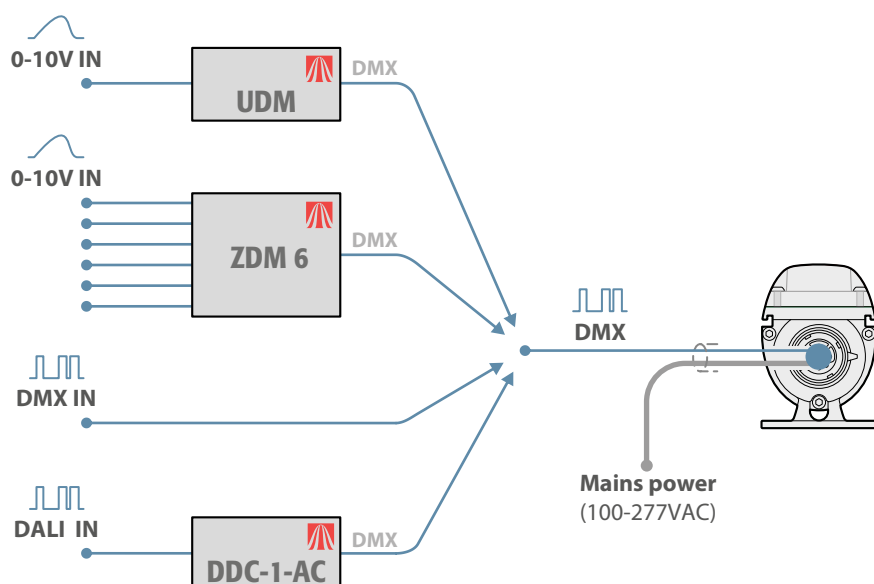

When using Acclaim Lighting ZDM 6 or DDC-1-AC modules it is possible to convert multiple inputs into separate DMX channels within a consolidated feed - thus allowing multiple Linear XTR fixtures to be uniquely addressed. The ZDM 6 can convert up to six 0-10V inputs into DMX channels, whereas the DDC-1-AC can convert a maximum of 64 DALI channels (although large numbers of channels are not recommended due to the timing limitations of the DALI standard).

Control inputs via an XTR Driver

The XTR Driver 4000 and 8000 units can accept DMX, 0-10V or DALI control inputs directly. The latter two methods are converted within the driver before being transmitted as DMX within the consolidated output, together with the high voltage XTR power.

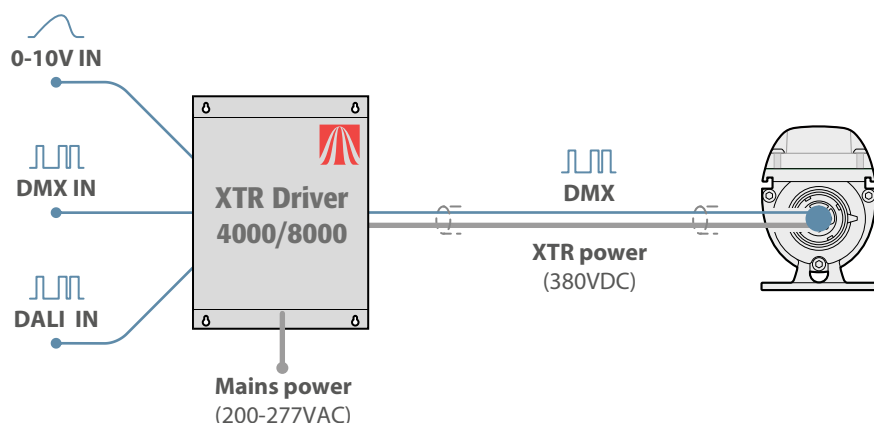

When using an XTR Driver, the internal conversion supports either a single 0-10V feed or a single 'broadcast' DALI channel - meaning that all Linear XTR fixtures will use the same single control address. To benefit from multiple channels, use a ZDM 6 or DDC-1-AC to externally convert signals (see above).



PROJECT

FIRM

ORDER #

TYPE

QTY

Unique addressing under DMX control

1' (305mm) Linear XTR

Emitter options	DMX channels used	Total channels per fixture	Maximum unique fixtures
	▶ Cell 1		
W	1	1	512
DW	2	2	256
RGBW/A	4	4	128

The maximum number of fixtures that can be uniquely addressed in a run is determined by the length, emitter type and operation mode of each linear fixture, as summarized in the tables shown here.

Additionally, any number of fixtures in a run can be configured to use duplicate control addresses, as required.


4' (1220mm) Linear XTR (operating in '1 Group' mode)

Emitter options	DMX channels used	Total channels per fixture	Maximum unique fixtures
	▶ All cells combined		
W	1	1	512
DW	2	2	256
RGBW/A	4	4	128

4' (1220mm) Linear XTR (operating in '4 Group' mode)

Emitter options	DMX channels used				Total channels per fixture	Maximum unique fixtures
	▶ Cell 1	Cell 2	Cell 3	Cell 4		
W	1	1	1	1	4	128
DW	2	2	2	2	8	64
RGBW/A	4	4	4	4	16	32

Important cabling considerations

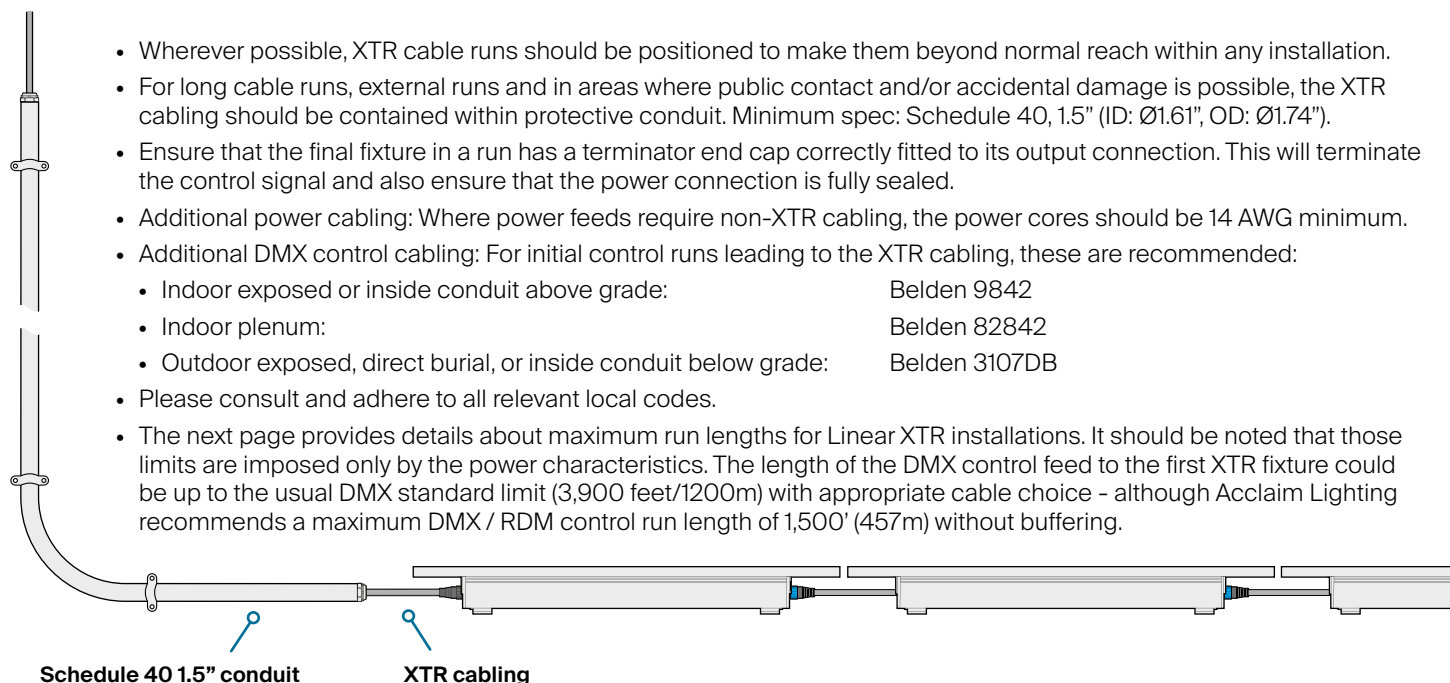

- Wherever possible, XTR cable runs should be positioned to make them beyond normal reach within any installation.
- For long cable runs, external runs and in areas where public contact and/or accidental damage is possible, the XTR cabling should be contained within protective conduit. Minimum spec: Schedule 40, 1.5" (ID: Ø1.61", OD: Ø1.74").
- Ensure that the final fixture in a run has a terminator end cap correctly fitted to its output connection. This will terminate the control signal and also ensure that the power connection is fully sealed.
- Additional power cabling: Where power feeds require non-XTR cabling, the power cores should be 14 AWG minimum.
- Additional DMX control cabling: For initial control runs leading to the XTR cabling, these are recommended:
 - Indoor exposed or inside conduit above grade: Belden 9842
 - Indoor plenum: Belden 82842
 - Outdoor exposed, direct burial, or inside conduit below grade: Belden 3107DB
- Please consult and adhere to all relevant local codes.
- The next page provides details about maximum run lengths for Linear XTR installations. It should be noted that those limits are imposed only by the power characteristics. The length of the DMX control feed to the first XTR fixture could be up to the usual DMX standard limit (3,900 feet/1200m) with appropriate cable choice - although Acclaim Lighting recommends a maximum DMX / RDM control run length of 1,500' (457m) without buffering.

PROJECT

FIRM

ORDER #


TYPE

QTY


Run lengths

Linear XTR fixtures can be fed directly from a suitably protected mains supply (100 to 277VAC 50/60Hz) to provide standard run lengths up to 400' (122m). Alternatively, an Acclaim Lighting XTR Driver can create an increased supply voltage to allow continuous runs up to 700' (213m). *Note: Linear XTR fixtures can use either power method without any reconfiguration; voltage levels are automatically detected.*

Standard run lengths: Mains input plus AJBOX1 and feed cable

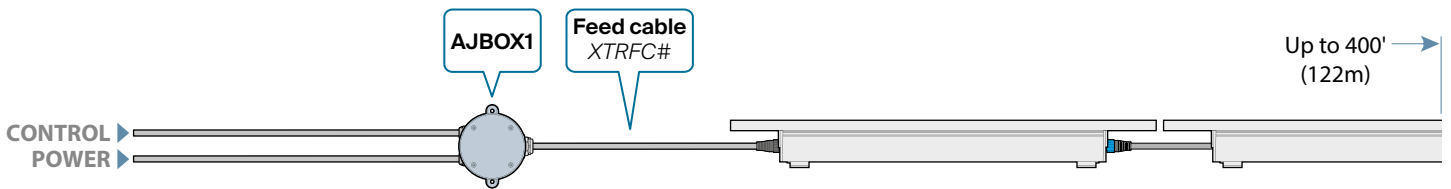

Extended run lengths: XTR Driver plus link cable

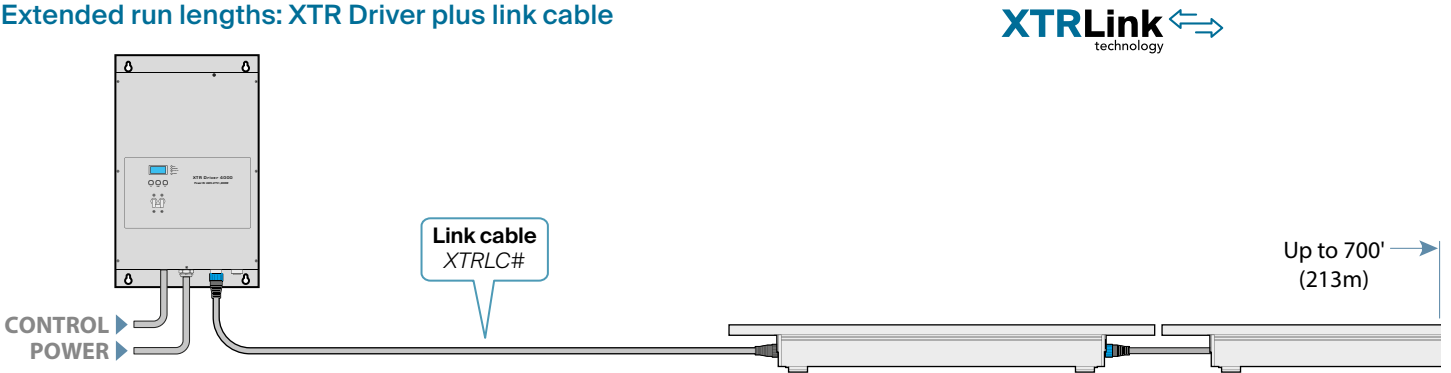

Maximum length of fixtures in a single run (all fixtures controlled within a single DMX universe)

	Power draw	100/120VAC supply	230/277VAC supply	XTR Driver 4000	XTR Driver 8000
LO	2.5 per foot	200' (61m)	400' (122m)	700' (213m)	2x 700' (213m)
EO	5W per foot	200' (61m)	400' (122m)	700' (213m)	2x 700' (213m)
SO	12W per foot	100' (30.5m)	200' (61m)	300' (91.5m)	2x 300' (91.5m)

Maximum overall length of a single run (fixtures + all cabling) (all fixtures controlled within a single DMX universe)

	100/120VAC supply	230/277VAC supply	XTR Driver 4000	XTR Driver 8000
All models	200' (61m)	400' (122m)	800' (243m)	2x 800' (243m)

Behaviors if the control signal is lost or not applied

- If the DMX control signal is not present while power is applied, the fixtures will respond in the following ways:
- Single color versions - when DMX is lost (or not used), each fixture will go to full output until the control signal is restored. If power is cycled while the control signal is absent, each fixture will remain at full until the signal is restored. If 100% output is required at all times during normal operation, this feature allows the fixtures to be fed with power only, without need for a control input.
 - Dynamic white, RGBW and RGBA versions - when DMX is lost, each fixture will hold the last received values until the control signal is restored. If power is cycled while the control signal is absent, each fixture will retain the last received values until the signal is restored.

For full installation details, please refer to the **user guide**, available for free download here: