





Client:
Project:
Туре:
Order Code:
Quantity:

Pixel Driver 400 is an ARTNET to SPI driver designed for Acclaim Flex Tube Pixel products. It has built-in 24VDC power, Artnet input & networking, and can directly drive up to two (5m) spools *or* up to four (4.2m) spools of Flex Tube Pixel.

SPECIFICATIONS

Power Input	100-277VAC, 50/60 Hz
Control Input	Art-Net via ethernet (up to and including Art-Net III)
Output	SPI + 24VDC
SPI IC Compatibility	UCS2903 (default), UCS2904, WS2811, WS2812, TM1812, WS2801, APA101
Mounting	Removable 2U 19" rackmount ears or desktop with included feet
Finish	Black
Material	Aluminum
Ambient Operating Temperature	14° F to 131° F (-10° C to 55° C)
IP Rating	IP20, dry location
IK Rating	IK02, protection against 0.2 joule impact
Fixture Connectors	Removable multi-pin terminal blocks
Warranty	5 Years, limited
Weight	12.3 lbs (5.6 kg)
Dimensions	W: 14.52" L: 5.9" H: 3.38" / W: 369mm L: 150mm H: 86mm
Certifications	ellos (€


ORDER CODE

PIX400



DIMENSIONS



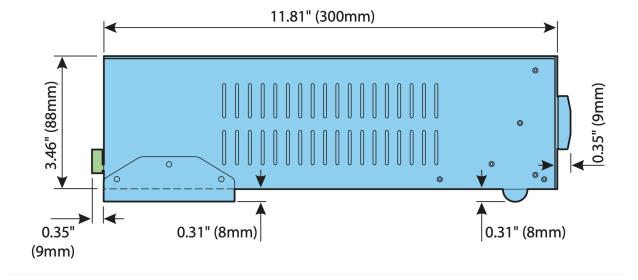



SETUP

