

PROJECT

FIRM

ORDER #





TYPE

QTY



Flex Swivel Channel is a double anodized aluminum channel for Acclaim Flex Interior products. It features a low profile design and mounting brackets that can pivot up to 90°.



At a glance

 Temperature 32° F to 104° F 0° C to 40° C	 Protection IP20 Dry location	 Material <div> <div>13</div> <div>Al</div> <div>Aluminum</div> <div>26.981</div> </div>	 Compatible with: Flex Eco Interior Ai Flex Interior Flex One SO Interior Flex One HO Interior
---	---	--	--

Order code

FLK SWI 3.28' (1m) length

Dimensions

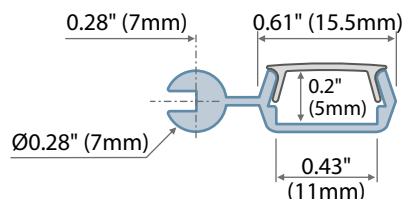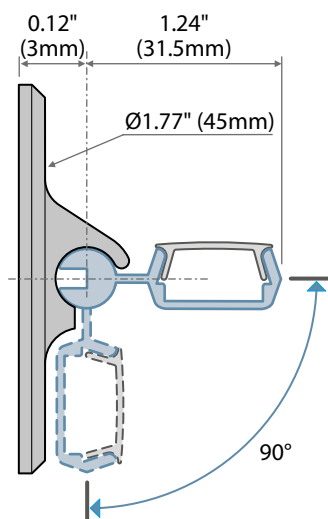

PROJECT

FIRM

ORDER #

TYPE


QTY

Specifications

Length	3.28' (1m), cut to length as required
Material	Double anodized aluminum, polycarbonate lenses
Ambient temperature range	32° F to 104° F (0° C to 40° C)
Ingress protection	IP22, dry location
Mounting	Via included mounting strip
Weight	0.45 lbs (0.204 kg)
Warranty	3 years, limited

Related components

Lenses - 3.28' (1m) in length

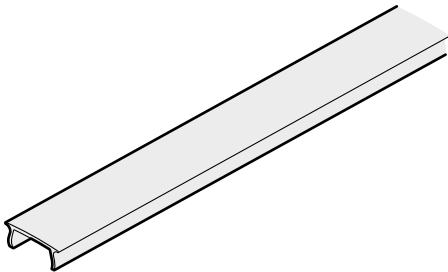

Clear
Frosted (50% diffusion)
Opal (100% diffusion)

FLK MFC
FLK MFL
FLK MOL

Ancillary items



Swivel mounting bracket (min 2 req.) **FLK SWI MB**



End cap **FLK SWI EC**

