


AL GRAZE AC™

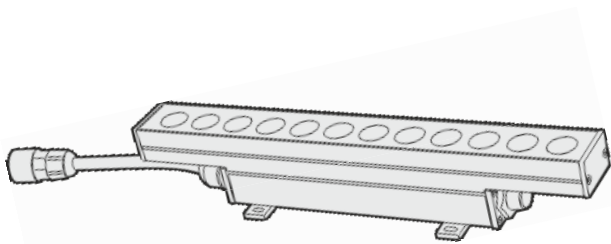

Client:

Project:

Type:

Order Code:

Quantity:

The **AL Graze AC** is a high power, low profile, outdoor linear LED fixture. Featuring a robust IP66 housing, on-board AC + DMX driver, and linkable cable system, it is the perfect option for any structure that calls for indoor or outdoor linear grazing.

SPECIFICATIONS

Color	2700K, 3000K, 3500K, 4000K, RGB, RGBW, RGBA, DW (2400K-5500K)
Beam Angle	10° x 60°, 30° x 60°, 10° x 10°, 60° x 60°, 20° Asymmetric Wall Wash
Max Fixtures In Series	50' @ 120V, 100' @ 230-277VAC
Photometrics	Up to 419 lumens per foot (4000K, 30° x 60° 1'), >80 CRI
Control	DMX-512 (internal), 0-10V (via external UDM)
Mounting	30° Swivel Mount and Fixed Flat Mount Included
Power Consumption	9W per linear foot
Operating Voltage	100-277VAC
Lumen Maintenance	L70 @ 150,000 Hours (25° C)
Finish	Silver, Anodized Aluminum
Housing Material	Aluminum body; Glass Top Lens
Operating Temperature	-40°F to 123°F (-40°C to 50°C)
IP Rating	IP66, Wet or Dry Location
Fixture Connectors	Multipin IP66 Connectors, End to end jumpers attached to each fixture
Warranty	5 Years
Weight	1' - 1.25 lbs / 0.6 kg, 4' - 5 lbs / 2.3 kg
Dimensions	See dimensions section on page 2 for options

Certifications




AL GRAZE AC™

ORDER CODES

* Indicates Special Order

Model	Control	Housing Color	Glass Cover	Length	Beam	Color	Input voltage
AGH -	2	4	1	-	#	#	#
	Control: 2 = Internal DMX	Housing Color: 4 = Finsihed Aluminum (silver)	Glass Cover: 1 = Clear	Length: A = 12" D = 48"	Beam: B = 10° x 10°* K = 60° x 60°* P = 10° x 60° Q = 30° x 60° S = 20° Asymm.	Color: A = 2700K B = 3000K D = 3500K E = 4000K H = RGB L = RGBW (W=6000K) Q = RGBW (W=4000K) J = RGBA M = DW (2400K-5500K)	Input Voltage: N = Normal (100-277VAC)


DIMENSIONS

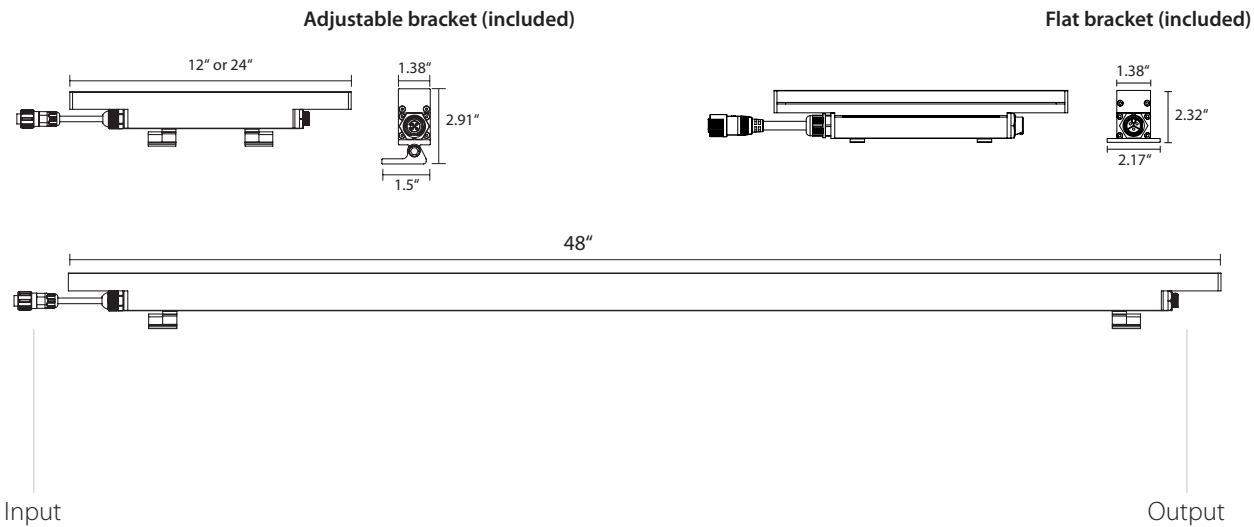


AL GRAZE AC™

RELATED COMPONENTS


Connection Cables




H6FC10
10' Feed Cable For AL Graze AC + End Cap
Powers up to 50' @ 120VAC



H6LC1
1' Link Cable for AL Graze AC



H6LC5
5' Link Cable for AL Graze AC




H6LC10
10' Link Cable for AL Graze AC



H6EC
End Cap for AL Graze AC

Mounting Accessories




AGEB6
AL Graze Extender Bar 6"

AGEB12
AL Graze Extender Bar 12"

AGEB18
AL Graze Extender Bar 18"

AGEB24
AL Graze Extender Bar 24"



AGLV12
12" Louver for AL Graze AC

AGLV48
48" Louver for AL Graze AC

AG90MB
90 Degree Mounting Bracket for AL Graze AC




AGS1
12" Single Sided Glare Shield for AL Graze AC



AGS4
48" Single Sided Glare Shield for AL Graze AC

Fixture Setup Accessories



XMT350
DMX + RDM Addressing and Testing Tool